

# INSTALLATION INSTRUCTION FOR N7801-613

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .  
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

READ AND SAVE THESE INSTRUCTIONS

## PREPATION

1. Shut off the power at the fuse box or circuit breaker box. If necessary, remove the old fixture and all mounting hardware from junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.

## ASSEMBLING THE FIXTURE(Fig.1)

3. Choose the suitable number of stems and install the stem (G, H, I, J) into the coupling (K), then thread the stem (G, H, I, J) onto the coupling (F). Carefully pass the wires through each rod during assembly.
4. Secure the top of the arms (N) to the metal ring (M) with the screws (O).
5. Secure the lower end of the arms (N) to the metal ring (Q) with the screws (P).
6. Move glass (R) and tube (S) into metal ring (Q) and secure them into the socket (L) with socket ring (T).

**NOTE: Please install the tube (S) opening inward.**

## MOUNTING THE FIXTURE (Fig.1)

7. Thread the two mounting screws (A) (Size: #8-32\*1.1"L) part way into the crossbar (B). Secure crossbar (B) to the junction box (not provided) with junction box screws (C) (Size: #8-32\*0.6"L). The length of mounting screws (A) into crossbar (B) may be adjusted if necessary. The side of the crossbar (B) marked "GND" must face out.

## CONNECTING THE WIRES (Fig.2)

8. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the ground wires from the hanger ball and mounting plate to it. Otherwise, connect the ground wire from the hanger ball directly to the mounting plate ground wire and secure with the green screw provided. After wires are connected, tuck them carefully into the ceiling junction box.

## COMPLETING THE INSTALLATION (Fig. 1)

9. Align canopy (D) to mounting screws (A) and secure with cap nuts (E).
10. Install the proper light bulb for your fixture. Install the light bulb (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Fig.1

Set# A-016

- Crossbar
- Ground screw
- Mounting screw\*2
- Junction box screws\*2


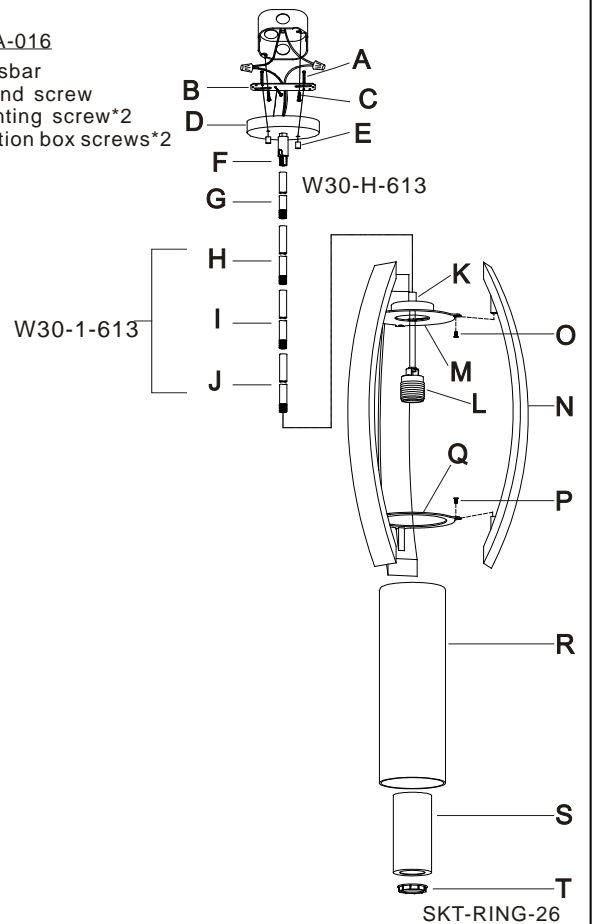


Fig.2



Your installation is now complete. Return power to the outlet box and test the fixture.

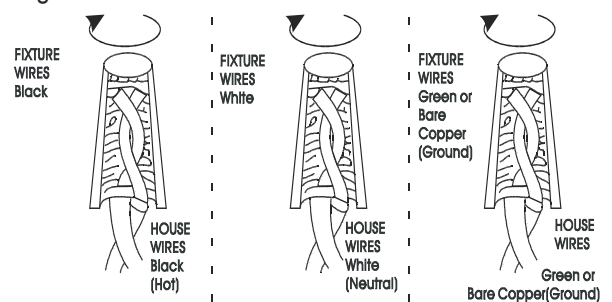