

INSTALLATION INSTRUCTION FOR N7808-613

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

READ AND SAVE THESE INSTRUCTIONS

PREPATION

1. Shut off the power at the fuse box or circuit breaker box. If necessary, remove the old fixture and all mounting hardware from junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.

ASSEMBLING THE FIXTURE(Fig.1)

3. Thread the stem (Q) onto the nipple (R).
4. Place the saddle (M) onto the nipple (N) and secure with coupling (L).
5. Choose the suitable number of stems and install the stem (H, I, J, K) into the coupling (L), then thread the stem (H, I, J, K) onto the coupling (G). Carefully pass the wires through each rod during assembly.
6. Secure the top of the arms (O) to the saddle (M) with the screws (P).
7. Secure the lower end of the arms (O) to the metal ring (S) with the screws (T).

MOUNTING THE FIXTURE (Fig.1)

8. Thread the two mounting screws (A) (Size: #8-32*1.1"L) part way into the crossbar (B). Secure crossbar (B) to the junction box (not provided) with junction box screws (C) (Size: #8-32*0.6"L). The length of mounting screws (A) into crossbar (B) may be adjusted if necessary. The side of the crossbar (B) marked "GND" must face out.
9. The support cable is provided to support the weight of the fixture while wiring. Attach the hook (D) on the end of the support cable to the crossbar. Carefully allow the support cable to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig.2)

10. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the ground wires from the hanger ball and mounting plate to it. Otherwise, connect the ground wire from the hanger ball directly to the mounting plate ground wire and secure with the green screw provided. After wires are connected, tuck them carefully into the ceiling junction box.

COMPLETING THE INSTALLATION (Fig. 1)

11. Align canopy (E) to mounting screws (A) and secure with cap nuts (F).
12. Place the glass shade (V) over the socket (U) and secure with the socket ring (W)
13. Install the proper light bulb for your fixture. Install the light bulb (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig.1

Set# A-016

- Crossbar
- Ground screw
- Mounting screw*2
- Junction box screws*2

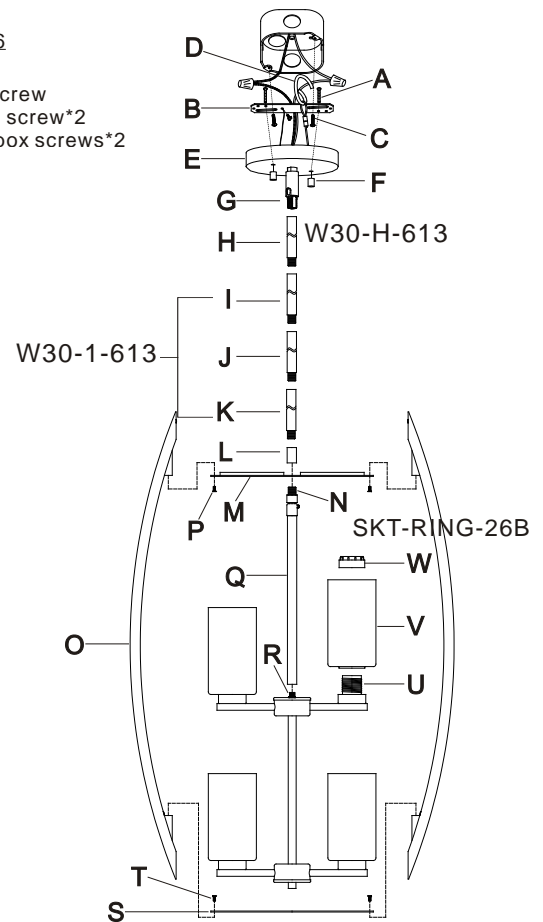


Fig.2

