INSTALLATION INSTRUCTIONS

Item #N950495-54B (2022/11/16)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING THE FIXTURE

- 1. Carefully unpack the new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.
- 2. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.

MOUNTING THE FIXTURE (Fig.1)

- Thread two fixture screws into pre-drilled holes on mounting plate. Spaced same distance apart as holes in canopy and tighten with hex nut. Note: The length of fixture screw into mounting strap may be adjusted if necessary.
- Attach mounting strap to junction box (not included) using JUNCTION BOX SCREWS (Size: #8-32*0.5L). The side of mounting strap marked "GND" must face out.





- 5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
- 6. Tuck wire connections neatly into junction box.

FINISHING THE INSTALLATION

- 7. Place fixture's canopy over screws (or all thread) and secure with decorative nuts.
- 8. Place candle covers onto sockets.
- Install (4) four candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

Your installation is now complete. Return power to the outlet box and test the fixture.

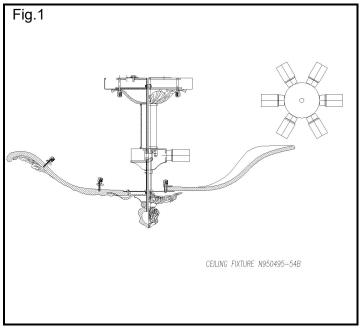

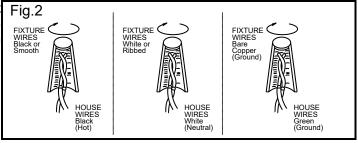

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased. Do not clean your light fixture or parts with water or cleaner.