

# INSTALLATION INSTRUCTIONS FOR P1077-L

## For LED Island Lamp

### READ AND SAVE THESE INSTRUCTIONS

#### WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

#### ASSEMBLING THE FIXTURE (Fig.1)

- 1 Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
- 2 Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
- 3 Position the mounting plate (D) (Part#A-021-290106A) onto the ceiling, and mark the location of the two drywall anchors (C). Pre-drill the holes for the drywall anchors (C) and insert the drywall anchors (C) into the ceiling.
- 4 Attach the mounting plate (D) to the outlet box with junction box screws (F) (size:8-32\*1/2"L). The side of the mounting plate marked "GND" must face out.
- 5 Place the wood screws (E) through the mounting plate and into the drywall anchors (C).
- 6 This fixture includes two 6" and six 12" rods. Determine the desired hanging height and thread rods (M1/M2) to nipple (N). Feed the fixture wire carefully through each rod. Please remove the nipple if installing with two 6" rod only.
- 7 Secure swivels (L) to the last section of rod (M).
- 8 Align canopy (J) onto the two swivels (L), and secure steel washers (Z), key washers (I1/I2), support cable (H) with hex nuts (G1).
- 9 The support cable is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (D) and attach hook (A) on the end of support cable (H) into a slot located on mounting plate (D). Carefully allow the support cable to support the weight of the fixture while wiring.

#### CONNECTING THE WIRES (Fig.2)

- 10 Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After the wires are connected, tuck them neatly into the outlet box.

#### COMPLETING THE INSTALLATION

- 11 Align canopy (J) to mounting plate (D) and secure with screw (K).
- 12 Thread rod (S) to joint (O). Align glass (T) to fixture and secure with finial (U).

Your installation is now complete. Return power to the junction box and test the fixture.

**CAUTION /ATTENTION:** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.

Fig.1


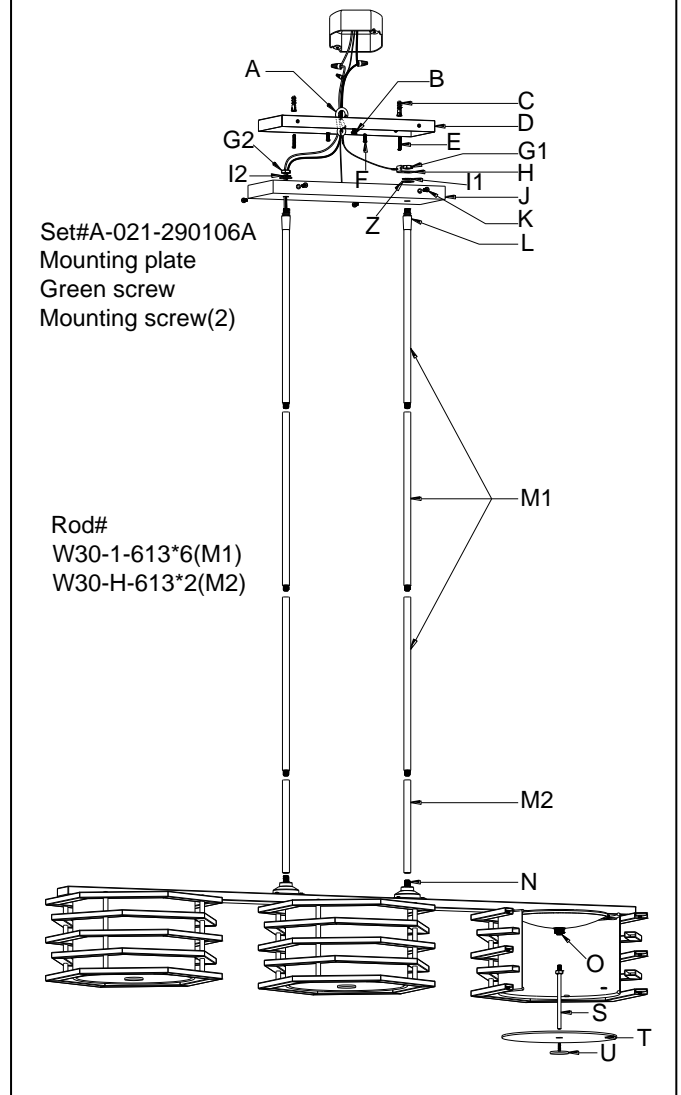


Fig.2

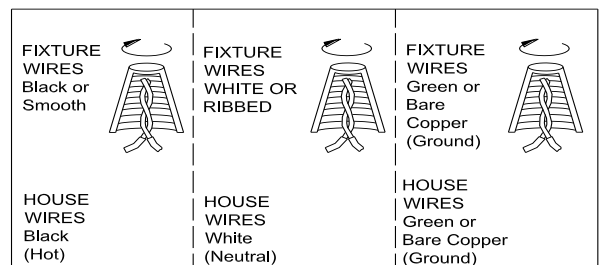

### Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig.3)

#### **Warning: Turn off power at the circuit breaker before replacing LED module.**

- a. Loose finial (U) remove glass (T) and loosen rod (S),
- b. Loosen screw (Y), lock collar (R) and rubber washer (Q) remove glass (P).
- c. Loosen screws (X) and remove gasket (W). Carefully remove LED module (V) and disconnect the wire using screwdriver from wire connector.
- d. Reverse steps a-c for installing the new LED module.

Note: The LED module should be provided by a specified supplier.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

**Dimmable with ELV and/or LED compatible wall dimmer switches.**

