

INSTALLATION INSTRUCTIONS

Item#P1360-619/66A (New. 2022/06/15)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

- Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
- Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
- Determine the desired hanging height and thread rods (F1, F2 and F3) to all thread (J) on the fixture body. Carefully pass the wires through each rod during assembly. Secure swivels (G) onto rods (F1).
- Align canopy (H), metal support plate (I) followed by lock washer (L) and metal washer (E) onto swivels (G) and secure with hex nuts (D) via wrench (J) (not included).
- Position mounting plate (A) on the ceiling and mark the location of the two drywall anchors (K). Pre-drill the holes for the drywall anchors (K). Then insert the drywall anchors (K) into the ceiling.
- Attach mounting plate (A) to the junction box (not included) using mounting screws (B) (Size: #8-32N*L0.5") and wood screws (O) into drywall anchors (K). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

- Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to mounting plate (A) using the green screw provided. After wires are connected, tuck them carefully inside the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

- Align canopy (H) over mounting plate (A) and secure with screws (C).
- Place glass shade (M) over socket (L) and secure with screw shell (N).
- Install (10) ten candelabra base bulbs (Q) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
- The dendrites of this lamp have the function of rotating a certain angle so that customers can make their own adjustments.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.


Fig.1

Set# A-021-220118

-Mounting Plate

-Ground Screw

-Mounting Screw*2


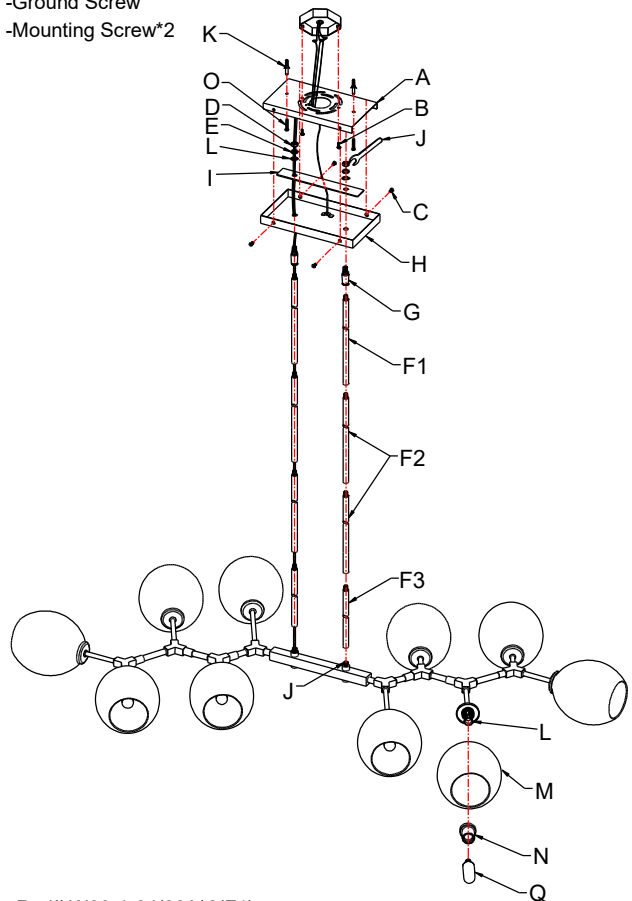


Rod# W30-1-84/66A*2(F1)

W30-1-84/66A *4(F2)

W30-H-84/66A *2(F3)

Fig. 2

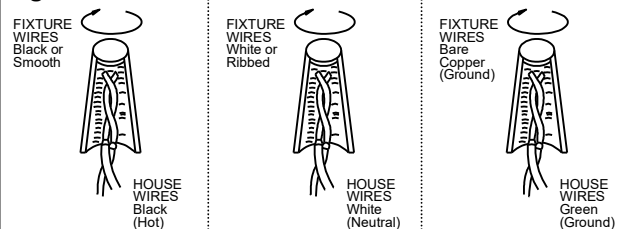

LA-2884E