

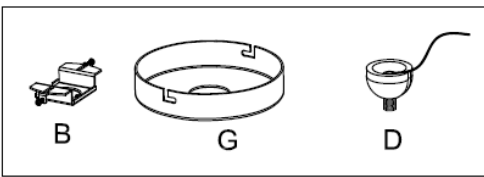




**Fig.2**

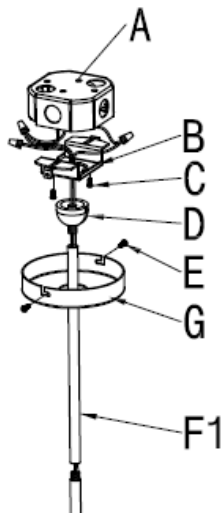

- a. Hardware bag:
- B. Mounting plate\*1
- G. Canopy\*1
- D. Hanger Ball\*1

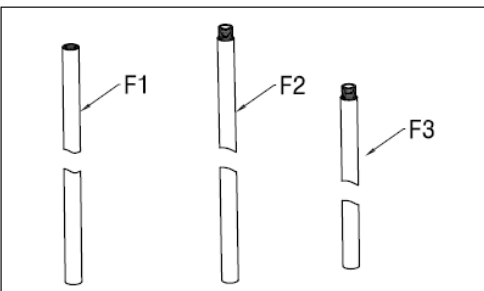


- b. Hardware bag:
- F1.Rod 12"\*1 Rod# W30-1-044G
- F2.Rod 12"\*2 Rod# W30-1-044G
- F3.Rod 6" \*1 Rod# W30-H-044G

**Replacing LED module (Fig. 4)**

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig.4.)

- a. Shut off power.
- b. Remove glass (K).and metal plate (J).
- c. Remove screws (M) and the glass diffuser (N).
- d. Remove screws (P) and washers (O).Use a pin to press the hole of the quick connector (Q) to disconnect the LED module. Carefully remove the LED module from bracket.
- e. Reverse steps a-d for installing the new LED module.
- f. Note: The LED module should be provided by a specified supplier.

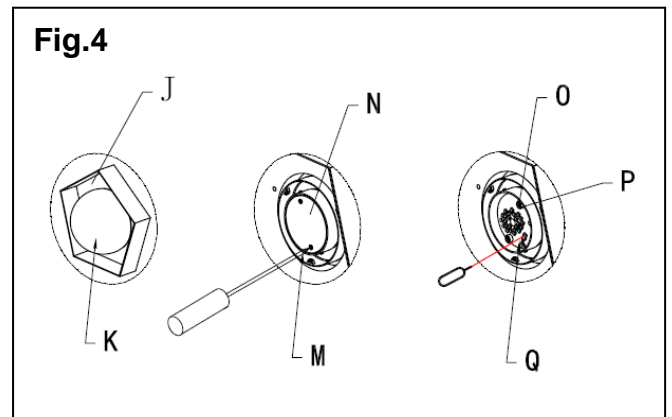

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.  
**Dimmable with ELV and/or LED compatible wall dimmer switches.**