

# INSTALLATION INSTRUCTIONS FOR P1432-077-L

## For LED Wall Mount

### READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR**

#### ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker. Remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in Figure 1. Unscrew screw (G) to remove the mounting plate (A) from the canopy (F).
3. Position mounting plate (A) on the wall, and mark the location of two dry wall anchors (W). Pre-drill the holes for the dry wall anchors. Insert the dry wall anchors (W) into the wall.
4. Attach the mounting plate (A) to the junction box using the mounting screws (B, size 8#-32N 1"). The side of the mounting plate marked "GND" must face out.
5. Place the wood screw (T) through the hole into the dry wall anchor (W) to secure the mounting plate (A) as shown in Fig.1.

#### CONNECTING THE WIRES (Fig. 2)

6. Pass the black/white and bare copper wires from the mounting plate (A). Connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the ground wire from the fixture to it. Otherwise connect fixture ground wire directly to the mounting plate using the green screw (D) provided. Tuck the wire connections neatly into the wall junction box as you hold the canopy towards the wall.

#### FINISHING THE INSTALLATION (Fig.1)


7. Fix the canopy (F) into the mounting plate (A) with screw (G).

Your installation is now complete. Return power to the junction box and test the fixture.

**CAUTION/ATTENTION:** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the frame only.

**IMPORTANT:** Fixtures should be installed by a qualified electrician to ensure proper wiring and installation. Dimmable with ELV and/or LED compatible wall dimmer switches.


Fig 1

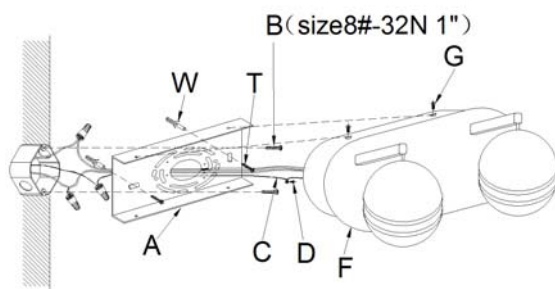

Set# A-020-170102

- mounting plate
- Ground Screw
- Mounting Screw\*2

Fig.2

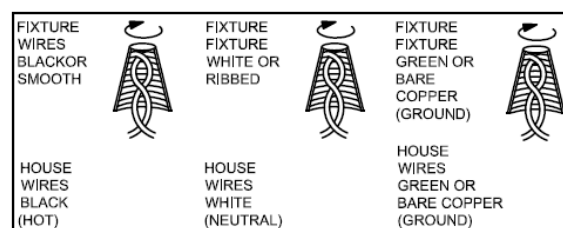

# INSTALLATION INSTRUCTIONS FOR P1432-077-L

## For LED Wall Mount

### READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR**

#### LED module replace (Fig.3)

Shut off power before replacing.

1. There are 2 LED modules in each head with this fixture, if one of them does not work, replace it as shown in Fig.3. Make sure the power is off before you replace.
2. Turn the acrylic shade (H), unscrew the screw (I) with screw driver to open the acrylic shade (J).
3. Use a pin press the quick connector (K), disconnect the wires respectively, replace a new metal (L) and module.
4. Repeat 3-1 to assemble the fixture.

Your installation is now complete. Return power to the junction box and test the fixtures.

Fig 3

