

# INSTALLATION INSTRUCTIONS FOR P1472-077-L

## For LED Wall Mount

### READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU**

#### ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Unscrew (G) to remove the mounting plate (A) from the canopy (F).
4. Position mounting plate (A) on the wall and mark the location for the two dry wall anchors (W). Pre-drill the holes for the dry wall anchors (W). Insert the dry wall anchors (W) into the wall.
5. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (B) (size 8#-32N 1"). Note: The side of the mounting plate (A) marked "GND" must face out.
6. Insert the wood screws (T) into the dry wall anchors (W) to secure the mounting plate (A).

#### CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2 making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided. Tuck wires neatly back into the junction box.

#### FINISHING THE INSTALLATION (Fig.1)


8. Fix the canopy (F) into the mounting plate (A) with screws (G).
9. Align clear glass shade (J) with the threaded holder (E).
10. Place the silicone ring (I) into the hole of the clear glass shade (J).
11. Screw the stainless steel shade (H) on to the threaded holder (E). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

**CAUTION/ATTENTION:** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the frame only.

**IMPORTANT:** Fixtures should be installed by a qualified electrician to ensure proper wiring and installation. Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig 1

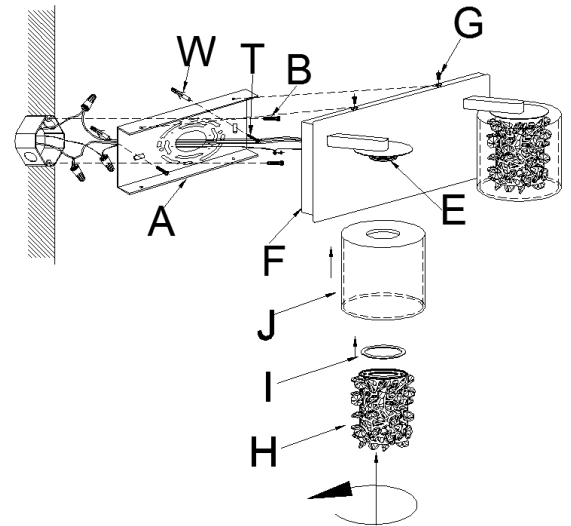


Set# A-020-170102

-mounting plate

-Ground Screw

-Mounting Screw\*2

Fig.2

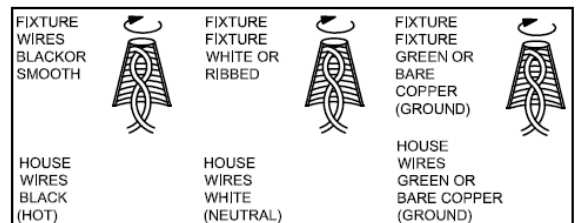

# INSTALLATION INSTRUCTIONS FOR P1472-077-L

## For LED Wall Mount

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU**

### LED module replace (Fig.3)

Shut off power before replacing.

1. There is one (1) LED module in each head with this fixture, if one of them does not work, replace it as shown in Fig. 3. Make sure the power is off before you replace.
2. Unscrew the stainless steel shade (H) from threaded holder (E). Remove the silicone ring (I) and the clear glass shade (J).
3. Unscrew the screw (L) and then take out the acrylic sheet (M) and gasket (N).
4. Use a pin press the quick connector (K) to disconnect the wire plug.
5. Replace with new module.
6. Repeat steps 4-1 to reassemble the fixture.

Your installation is now complete. Return power to the junction box and test the fixtures.

Fig 3

