

INSTALLATION INSTRUCTIONS FOR P1473-077-L

For LED Wall Mount

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Unscrew (G) to remove the mounting plate (A) from the canopy (F).
4. Position mounting plate (A) on the wall and mark the location for the two dry wall anchors (W). Predrill the holes for the dry wall anchors (W). Insert the dry wall anchors (W) into the wall.
5. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (B) (size 8#-32N 1"). Note: The side of the mounting plate (A) marked "GND" must face out.
6. Insert the wood screws (T) into the dry wall anchors (W) to secure the mounting plate (A).

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2 making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided. Tuck wires neatly back into the junction box.

FINISHING THE INSTALLATION (Fig.1)


8. Fix the canopy (F) into the mounting plate (A) with screws (G).
9. Align clear glass shade (J) with the threaded holder (E).
10. Place the silicone ring (I) into the hole of the clear glass shade (J).
11. Screw the stainless steel shade (H) on to the threaded holder (E). Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION/ATTENTION: When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the frame only.

IMPORTANT: Fixtures should be installed by a qualified electrician to ensure proper wiring and installation. Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig 1

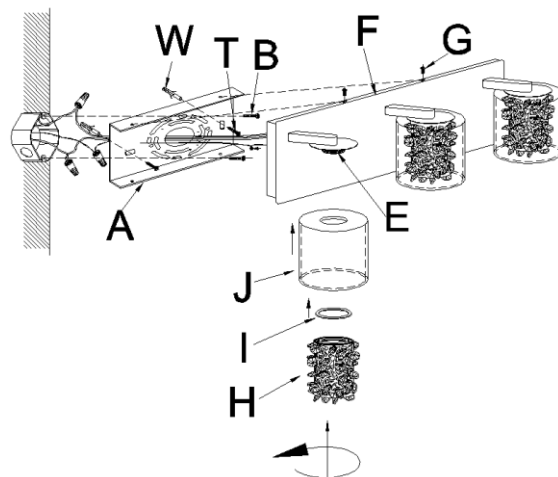

Set# A-020-170102

-mounting plate

-Ground Screw

-Mounting Screw*2

Fig.2

