# INSTALLATION INSTRUCTIONS FOR P1641-895-L For LED Pendant READ AND SAVE THESE INSTRUCTIONS

## WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER AVERTISSEMENT!COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEU

### ASSEMBLING THE FIXTURE (Fig.1)

- 1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
- 2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
- Attach mounting plate (A) to junction box (not included) using mounting screws (C) (Size: 8-32\*1/2"L). The side of mounting plate (A) marked "GND" must face out.
- 4. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (F1:W30-1-783 and F2:W30-H-783) to all thread on top of fixture. Feed fixture wire carefully through each rod. If installing with one 6" rod only. the all thread must be removed.
- 5. Secure rod to swivel of canopy (E).
- Use wire nuts to connect red output wire (marked output +) from driver to red LED wire (marked LED +) from led module. Connect black output wire (marked output -) from driver to black LED wire (marked LED -) from led module.


#### CONNECTING THE WIRES (Fig.2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to mounting plate (A) using the green screw (B) provided.

### **COMPLETING THE INSTALLATION**

8. Align canopy (E) onto mounting plate (A) and secure with screws (D).

Your installation is now complete. Return power to the junction box and test the fixture.

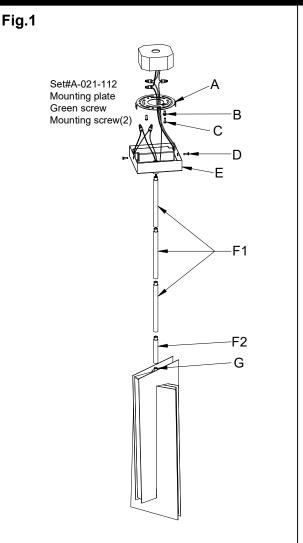

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches





