

INSTALLATION INSTRUCTIONS FOR P1642-895-L For LED Pendant

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Position mounting plate (B) onto the ceiling and mark the location of the four drywall anchors (A). Pre-drill the holes for drywall anchors (A) and insert drywall anchors (A) into the ceiling.
4. Attach mounting plate (B) to the junction box (not included) with mounting screws (E) (size:8-32*1/2"L). The side of mounting plate (B) marked "GND" must face out.
5. Place wood screws (C) through mounting plate (B) and into drywall anchors (A)
6. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (H1:W30-1-783 and H2:W30-H-783) to all thread on top of the fixture. Feed fixture wire carefully through each rod. If installing with one 6" rod only, the all thread must be removed.
7. Secure rod to swivel of canopy (G).
8. Use wire nuts to connect red output wire (marked output +) from driver to red LED wire (marked LED +) from led module. Connect black output wire (marked output -) from driver to black LED wire (marked LED -) from led module.
9. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (B) and attach hook (J) on the end of support cable (K) into a slot located on mounting plate (B). Carefully allow the support cable to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig.2)


10. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to mounting plate (B) using the green screw (D) provided.

COMPLETING THE INSTALLATION

11. Align canopy (G) onto mounting plate (B) and secure with screws (F).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

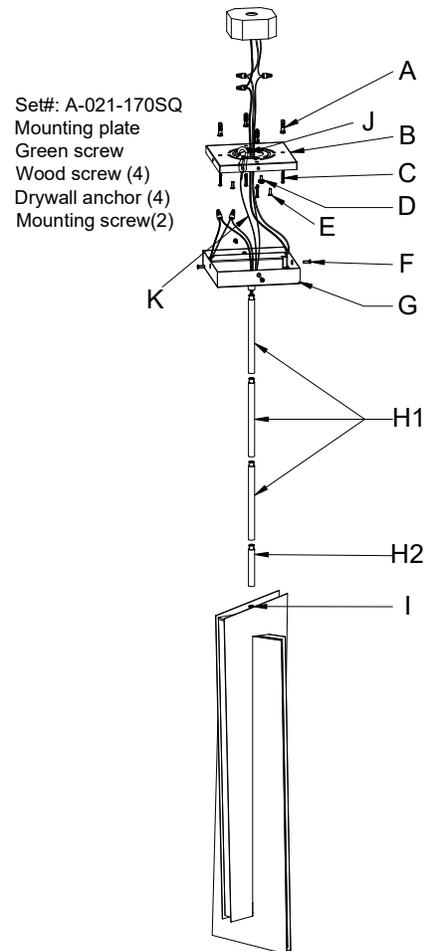

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches



Fig.2

