

INSTALLATION INSTRUCTIONS FOR P1650-077-L

For Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR.

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (FIG. 1)

3. Secure the shade (A) with allen screw (B) using allen screw wrench (C).
4. Secure mounting plate (E) to junction box (I) using junction boxes screws (G) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (FIG. 2)

5. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (E) using the green screw provided. After wires are connected, tuck them carefully inside the junction box.

FINISHING THE INSTALLATION (FIG.1)

6. Fix the canopy (D) to the mounting plate (E) by using screws (H).

Your installation is now completed. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or bracket.

Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)

- a. Shut off power. Loosen screw (H) to disconnect the canopy (D) from the mounting plate (E).
- b. Loosen the wire (P)
- c. Use the allen screw wrench (C) to loosen allen screw (B) and take off the acrylic shade (A)
- d. Remove the acrylic diffuser (J).
- e. Loosen screws (K) to disconnect LED module (O), and slightly pull out the LED module with the wire.
- f. Reverse steps a-e for installing the new LED module.

FIG.1

Set # A-020-105

- Mounting plate
- Ground screw
- Mounting screw*2pcs

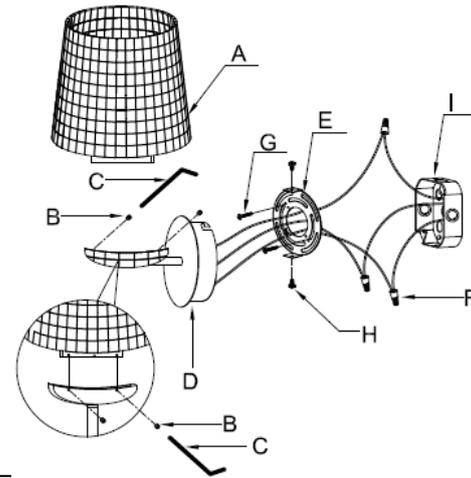


Fig.2


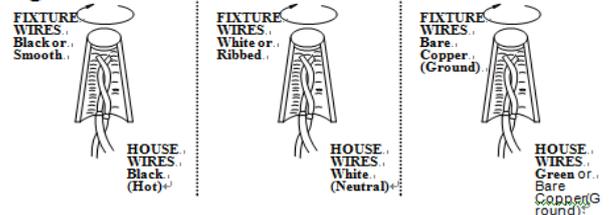


Fig.3



IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV dimmer switches.

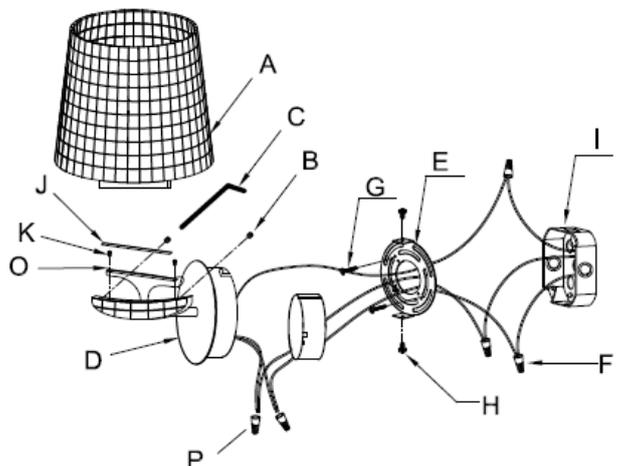