

INSTALLATION INSTRUCTIONS

Item#P1689-084 (Rev. 05/25/2021)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Secure rods (M) to fixture body (N) and bar (J) by using nuts (L).
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to all thread (I) on bar (J). Screw loop (H1) onto rod (F1). Carefully feed wire through each rod as you assemble.
5. Attach the quick link (G) to loop (H1) and loop (H2) on canopy (E). Carefully feed wire through loop (H1), quick link (G), and loop (H2).
6. Loosening screws (K) to remove mounting plate (C) from canopy (E). Positioning mounting plate (C) on ceiling and mark location of the two mounting holes for the plastic anchors (A). Drill the appropriate size holes on the ceiling and insert the plastic anchors (A).
7. Attach the mounting plate (C) to the junction box (not included), using mounting screws (B) (Size: #8-32N*L0.5"). The side of the mounting plate marked "GND" must face out.
8. Secure the mounting plate (C) by screwing wood screws (D) through the holes on the mounting plate into the plastic anchors (A).

CONNECTING THE WIRES (Fig. 2)

9. Connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (C) using the green screw provided.
10. Tuck wire connectors neatly into junction box.

COMPLETING THE INSTALLATION (Fig. 1)

11. Place canopy (E) over mounting plate (C) and secure with screws (K).
12. Place candle covers (P) over sockets (Q).
13. Install (10) ten candelabra base bulbs (O) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.


Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig. 1

Set#A-021-296117

- Mounting plate
- Ground screw
- Mounting screw*2

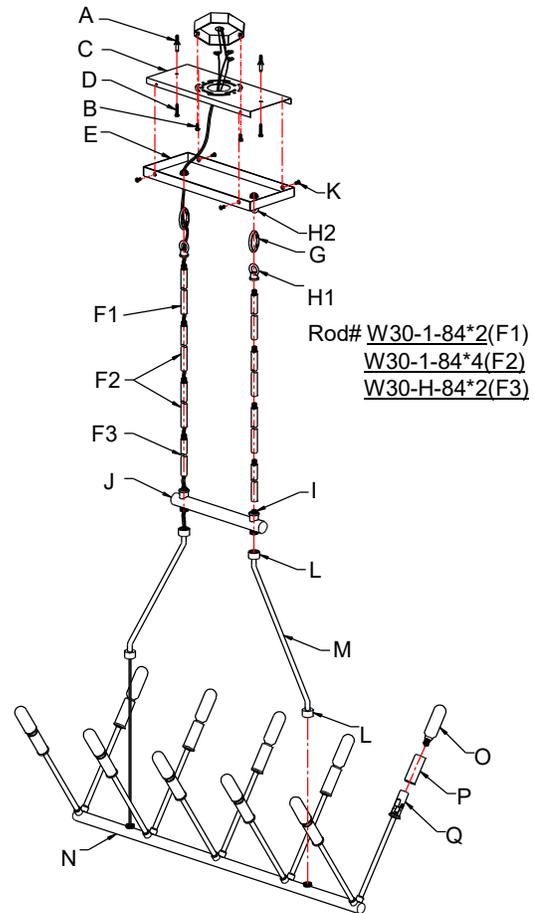

Rod# W30-1-84*2(F1)
W30-1-84*4(F2)
W30-H-84*2(F3)

Candle cover# CCV21057-084

Fig. 2

