

INSTALLATION INSTRUCTIONS FOR P1751-L

For Wall Sconce Fixture

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (A) on the wall and mark the location of the two drywall anchors (B). Pre-drill the holes for the drywall anchors (B). Then insert the drywall anchors (B) into the wall.
4. Attach the mounting plate (A) to the junction box (not included) with mounting screws (E) (Size: 8-32*1/2"L). Note: The side of the mounting plate marked "GND" must face out.
5. Screw the wood screws (C) through the holes of the mounting plate (A) and into the drywall anchors (B) to secure the mounting plate (A) to the wall.

CONNECTION THE WIRES (Fig.2)

6. Connect the electrical wires as shown in Fig.2. Make sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw (D) provided. Tuck the wire connectors neatly into the junction box.

FINISHING THE INSTALLATION (Fig.1)

7. Align fixture (H) onto mounting plate (A) and secure with screws (F) and rubber washers (G). **(Please follow the arrow located inside the fixture backplate marked "This side up only")**.
8. To prevent moisture from entering the outlet box and causing a short circuit, use clear caulking (i.e. Indoor/Outdoor silicone sealant) to outline the outside of fixture (F) where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig.3).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or back plate only.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.
Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

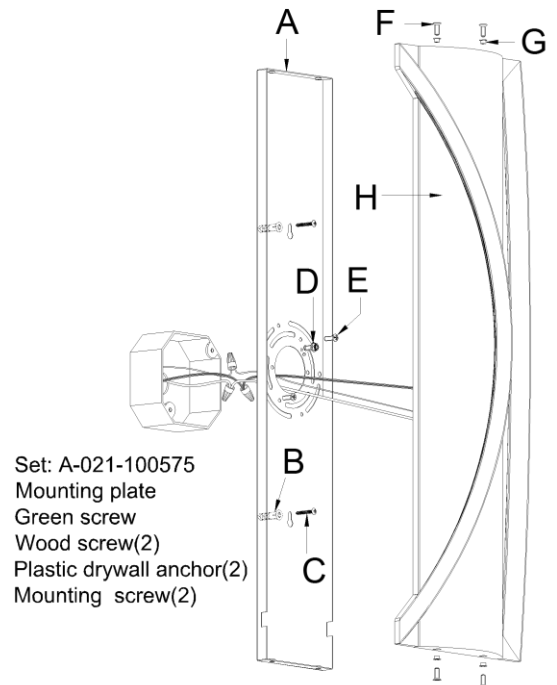


Fig. 2

FIXTURE WIRES Black or Smooth		FIXTURE WIRES WHITE OR RIBBED		FIXTURE WIRES Green or Bare Copper (Ground)	
HOUSE WIRES Black (Hot)		HOUSE WIRES White (Neutral)		HOUSE WIRES Green or Bare Copper (Ground)	

Fig.3

