

INSTALLATION INSTRUCTIONS

Item#P2015-044-L (New. 02/11/2019)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Remove both screws (C) and mounting plate (A).
4. Position the mounting plate (A) on the ceiling, and mark location of the two mounting holes. Drill the holes on the ceiling, and then insert the plastic anchors (E).
5. Attach the mounting plate (A) to the outlet box (not included) using mounting screws (B) (Size: #8-32N*L0.5"). Note: The side of the mounting plate marked "GND" must face out.
6. Secure the mounting plate (A) by inserting the wood screws (F) through the holes on the mounting plate (A) into the plastic anchors (E).

CONNECTING THE WIRES (Fig.2)

7. Connect the electrical wires as shown in Fig.2 making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided. Tuck wires neatly back into the junction box.

FINISHING THE INSTALLATION (FIG.1)

8. Secure the fixture (D) to the mounting plate (A) by using screws (C).

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Dimmable with LED compatible wall dimmer switches.

Fig. 1

Set#A-020-214

-Mounting Plate

-Ground Screw

-Mounting Screw*2


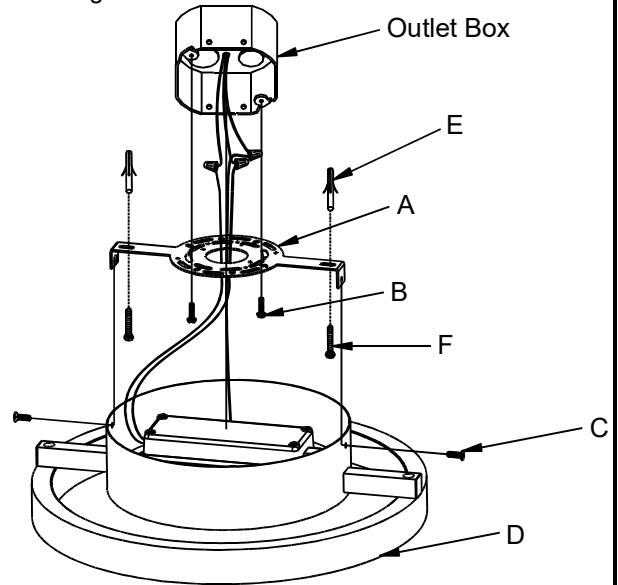


Fig. 2



LA-3100E

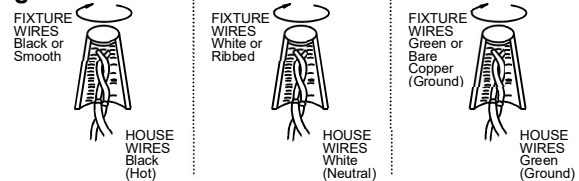

american
lighting
association