

INSTALLATION INSTRUCTIONS

For Model # P4358-1

READ AND SAVE THESE INSTRUCTIONS


WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

WARNING

- Risk of shock, do not plug in the unit before assembly.
- Do not exceed the maximum wattage rating (Max.100W).

MOUNTING THE LUMINAIRE, PLUG VERSION (Fig. 1). For hardwire go to fig.2

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Use mounting plate (A-1) as a template to pre-drill the holes for dry-wall anchors (N). Insert dry-wall anchors (NO into the wall.
3. Secure mounting plate (A-1) to the wall using screws (B) (provide).
4. Place the fixture body over the mounting plate (A-1) and secure with screws (C).
5. To secure the cord cover, install the dry-wall anchors (L) (provide) then secure the cord cover bracket (M) to the wall using screws (H) (provide). Place the cord (I) into the cord cover bracket (M) and snap the cover (J) over the cord (I).
6. Place glass (E) onto socket holder (D).
7. Install the 1*100W A19 light bulb (F) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING, 100W Max.) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
8. Remove the protective covering from the shade.
9. Attach the shade (G) to the glass.

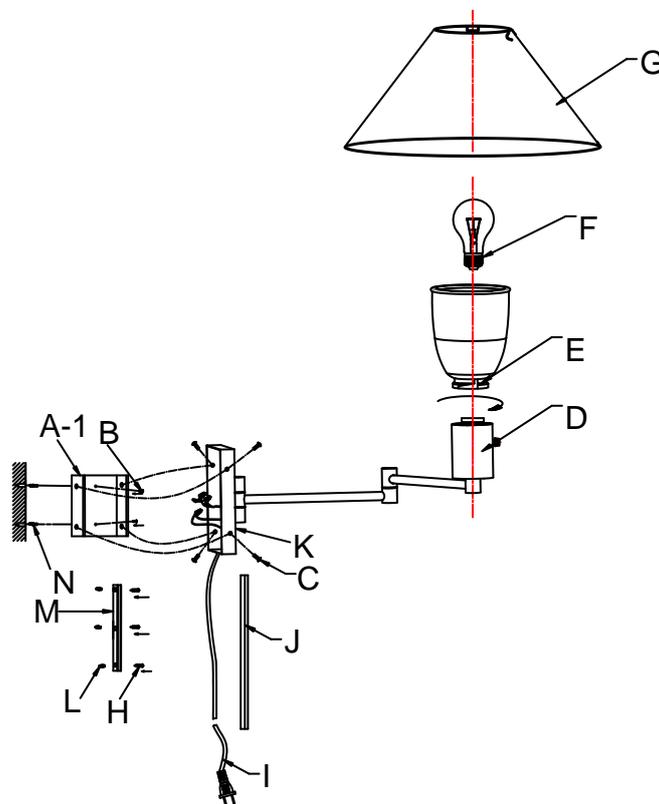

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

IN AN ONGOING EFFORT TO BE ENVIROMENTALLY FRIENDLY AND IN COMPLIANCE WITH CALIFORNIA TITLE 20. AN ENERGY SAVING COMPACT FLUORESCENT BULB(S) IS INCLUDED. PLEASE NOTE THAT THE LIFE EXPECTANCY OF THE BULB(S) IS NOT GUARANTEED.

INSTALLATION INSTRUCTIONS

For Model # P4358-1

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER. FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

MOUNTING THE FIXTURE, HARDWIRE VERSION (Fig. 2)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Remove the cord and plug by disconnecting the wire nuts in the back plate.
4. Secure mounting plate (A) to the outlet box using screws (B). The side of the mounting bracket marked "GND" must face out.

CONNECTING THE WIRES (Fig. 3)



5. Connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided.

FINISHING THE INSTALLATION (Fig. 2)

6. Align fixture body (H) to mounting plate (A) and secure with screws (C).
7. Insert plug (O) into the hole in fixture body (H).
8. Place glass (E) on to socket holder (D).
9. Install the 1*100W A19 Light Bulb (F) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING, 100W Max.) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. Remove the protective covering from the shade.
11. Attach the shade (G) to the glass.

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

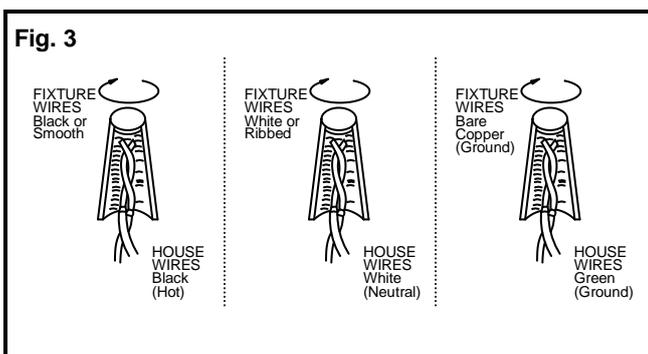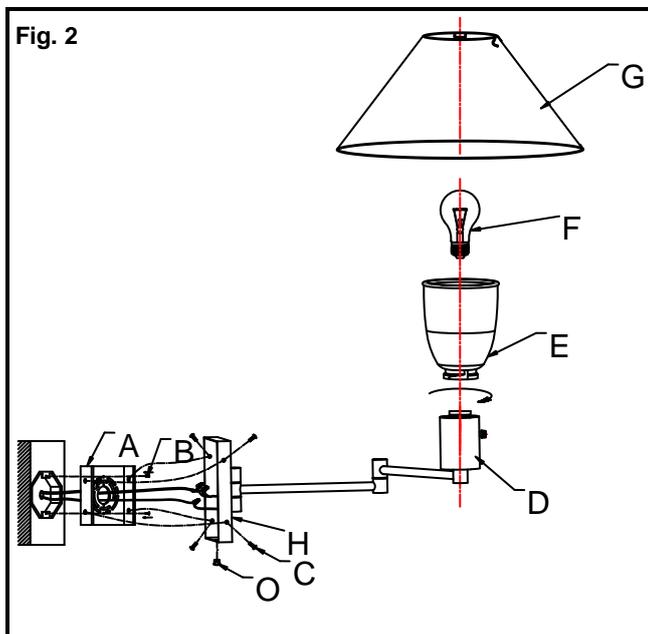

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.



LA-1968E