

INSTALLATION INSTRUCTIONS

Item#P5425-572

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
3. Loosen hex nuts (P) on canopy (D) with wrench (O) (not included). Separate lock washers (Q), metal washers (R), canopy (D) and swivels (N).
4. Determine the desired hanging height and thread rods (F1, F2) to the all thread on fixture body (G). Pass wires carefully through each rod as you assemble. Screw swivels (N) onto rods (F1). Carefully feed the wire through the swivel (N).
5. Align canopy (D) followed by metal washers (R) and lock washers (Q) onto swivels (N) and secure with hex nuts (P).

CONNECTING THE WIRES (Fig. 2)

6. Connect electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to circular strap (B) using the green screw provided.
7. Thread screws (A) into the pre-drilled holes in circular strap (B) spaced the same distance apart as the holes in the canopy (D). The length of screws (A) may be adjusted if necessary.
8. Attach circular strap (B) to the junction box (not included) using mounting screws (C) (Size: #8-32N*L25mm). The side of the circular strap marked "GND" must face out.
9. Tuck wire connectors neatly into the junction box.

FINISH THE INSTALLATION (Fig. 1)


10. Slide screws (A) through canopy (D) and secure with finials (E).
11. Install (5) five candelabra base bulbs (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
12. Loosen finial (H) and socket cup (J). Slide glass shade (M) over bulb (L) and hang glass shade (M) on the holder (K).
13. Slide socket cup (J) over all thread (I) and secure glass shade (M) with finial (H).

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

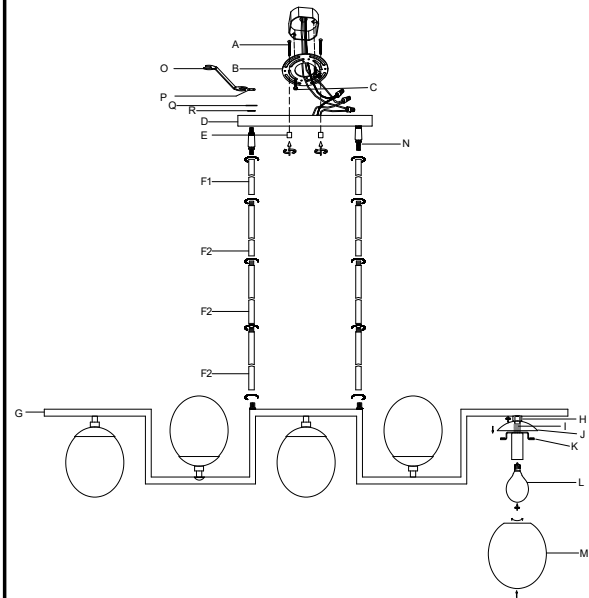

Set#A-020


- Circular Strap
- Ground Screw
- Mounting Screw*2

Rod#

W30-H-66A*2(F1)

W30-1-66A*6(F2)

Fig. 2

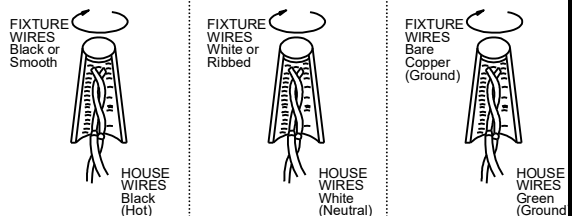

c **UL** us
LISTED

american
lighting
association