

# INSTALLATION INSTRUCTIONS

Item#P564-077-L

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR**

## WARNING

- Risk of shock, do not supply power to fixture before assembly is complete.
- Do not exceed the maximum wattage rating

## MOUNTING INSTRUCTIONS

1. Shut off power at the circuit breaker and remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Remove mounting screw (C) (Size: 1.57\*5.51") from fixture body (F). Secure mounting bracket (A) using mounting screws (B) (Size: 1.57\*6.30") to the outlet box. The side of the mounting bracket marked "GND" must face out.

## CONNECTING THE WIRES (Fig. 1)

4. Connect the electrical wires as shown in Fig. 1, making sure that all wire connectors (D) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting bracket using the green screw provided.

## FINISHING THE INSTALLATION

5. Place fixture body (F) onto mounting bracket (A) and secure with screws (C) (Size: 1.57\*5.51").
6. Place glass (E) into the lower support clip and move into position against the fixture body (F). Place the upper clip (H) onto fixture body (F) and secure with screws (G).

Your installation is now complete. Return power and test the fixture.

**Note:** Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

**CAUTION /ATTENTION :** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or fixture body (J) only.

## Replacing LED module (Fig. 2)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 2)

- a. Remove screws (G) upper clip (H) and glass shade (E).
- b. Remove the wire nuts located inside the fixture backplate to disconnect the LED module.
- c. Remove screws (J) on the fixture body (F). Carefully remove the LED module (I) from the fixture body (F).
- d. Reverse steps a-c for installing the new LED module.
- e. Note: The LED module should be provided by a specified supplier.
- f. For better heat dissipation the LED module (I) should be applied with thermal grease when re-lamping.

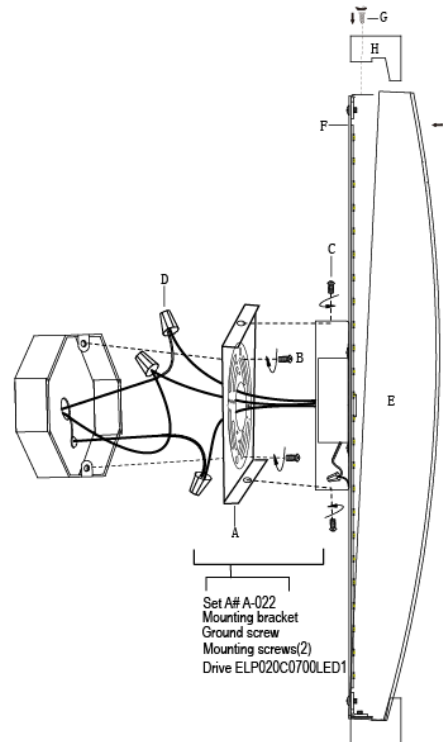


Fig. 1


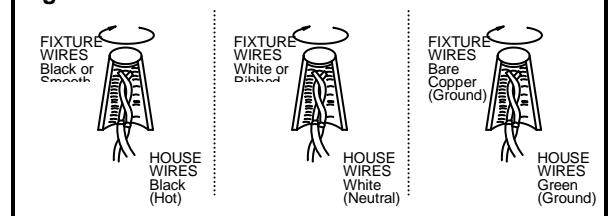


Fig. 2

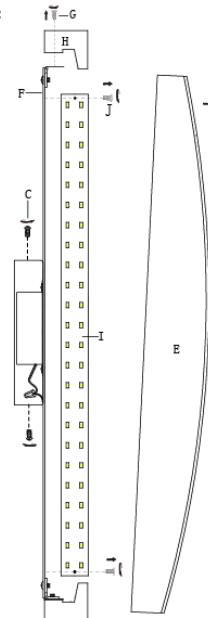

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**