

# INSTALLATION INSTRUCTIONS

For Models # P5770-695#084

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Remove cap nut (F) from lamp body (E). Secure crossbar (A) using mounting screws (B) to the outlet box (not included). The length of all thread into crossbar (A) may be adjusted if necessary. Make sure the side of the crossbar (A) marked "GND" must face out.

## CONNECTING THE WIRES (Fig. 2)

4. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors (C) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (A) using the green screw provided.

## FINISHING THE INSTALLATION (Fig. 1)

5. Install (1) one medium base bulb (D) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
6. Align lamp body (E) onto crossbar (A) and secure with cap nut (F).

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

Set#A-010

- Crossbar
- Green Screw
- Mounting Screw\*2

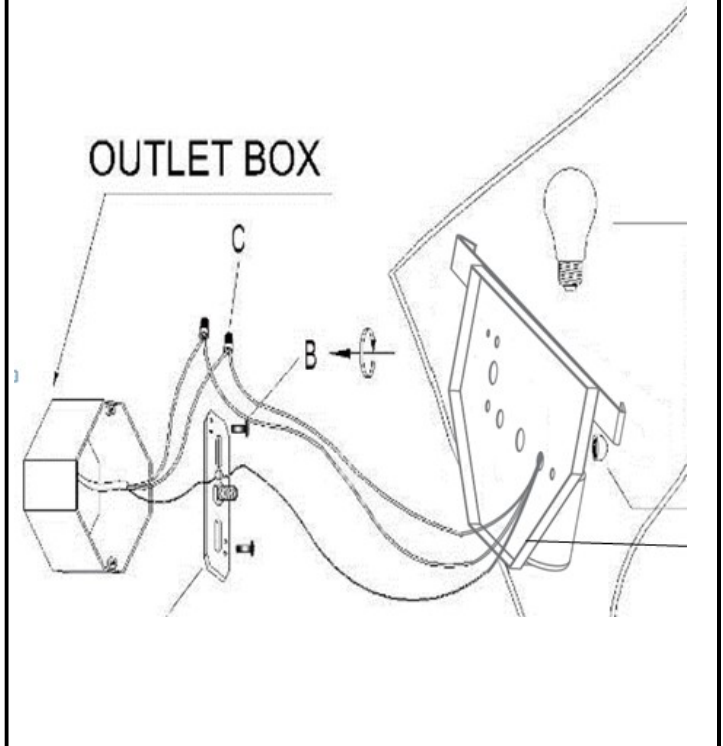


Fig. 2

