

INSTALLATION INSTRUCTIONS

For model#: P600-3-603/615

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

Fig. 1

WARNING



- Risk of shock, do not plug in the unit before assembly is completed.
- Do not exceed the maximum wattage rating (60W).
- Before you begin assembly of your new fixture, please follow the instruction manual step by step.

MOUNTING THE LUMINAIRE (Fig. 1)

- Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
- Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
- Using the mounting plate as a guide, mark the location of the dry wall anchors. Pre-drill the holes for the drywall anchors.
- Secure the mounting plate (B) to the wall by using screws (C) and dry wall anchors (A).
- Place fixture body (E) over the mounting plate (B) and secure with four screw stud (F) and (D).
- Install the cord cover bracket (H) with the screws and dry wall anchors to the wall. Place fixture cord into cord cover (G) and snap the cord cover (G) over the cord.
- Install the Med. base A19 light bulb (A) into the socket.
- (DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

IMPORTANT SAFETY INSTRUCTIONS

- This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted. Do not change or alter the plug.
- This lamp use on-off switch on base. Please use A19 60W, E26 bulb.

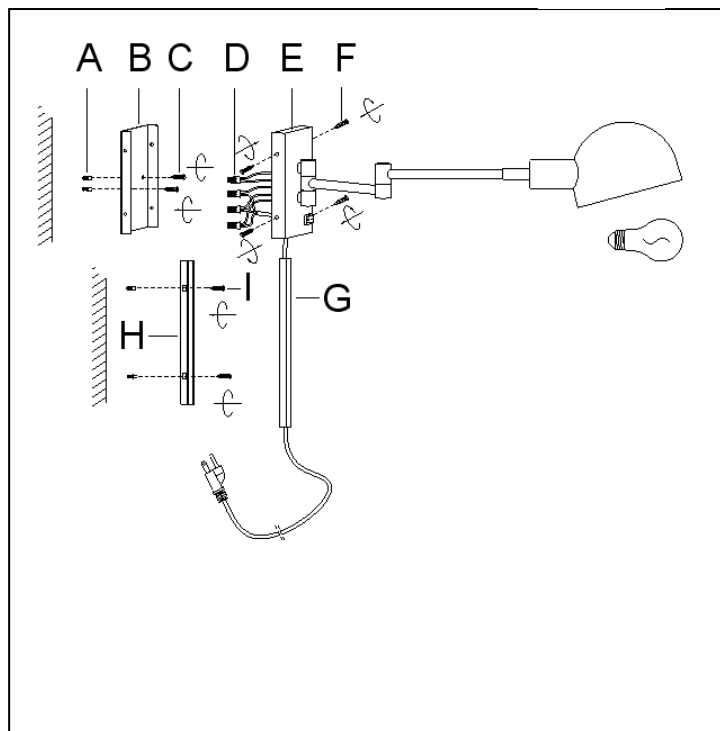

Spare Parts Bag A:

- A: Plastic Anchor--- 1”L (5PCS)**
- C: Screw--- M4 * 1”L(5PCS)**


INSTALLATION INSTRUCTIONS

For model#: P600-3-603/615

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.
FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.


MOUNTING THE FIXTURE, HARDWARE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the crossbar.
3. Remove the cord and plug by disconnecting the wire nuts to the cord.
4. Attach the mounting plate (K) to the Junction Box using the 2 Junction Box Screws (L). The side of the mounting plate marked "GND" must face out.

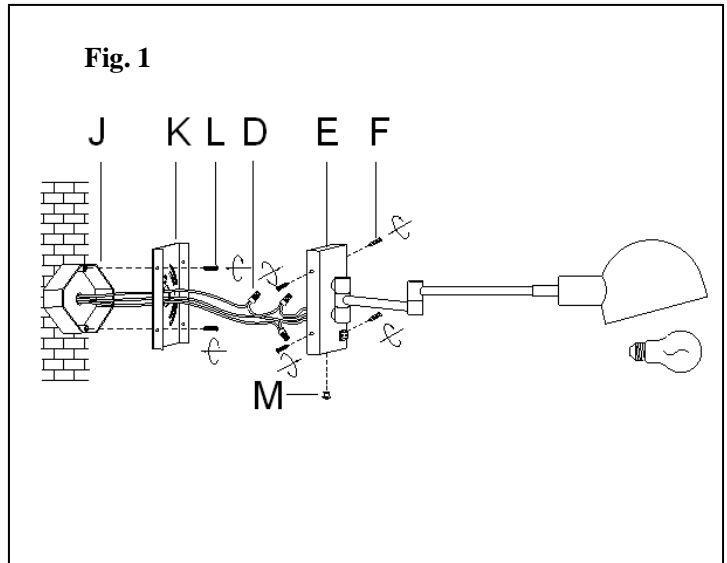

CONNECTING THE WIRES (Fig. 2)

5. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors (D) are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the Square Strap using the Green Screw provided. Tuck the wire connections neatly into the outlet box.
6. Place fixture body (E) over the mounting plate (K) then secure them tightly with four screw stud by screwdriver
7. Insert plug (M) into hole in fixture body
8. Install the light bulb into the socket
9. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

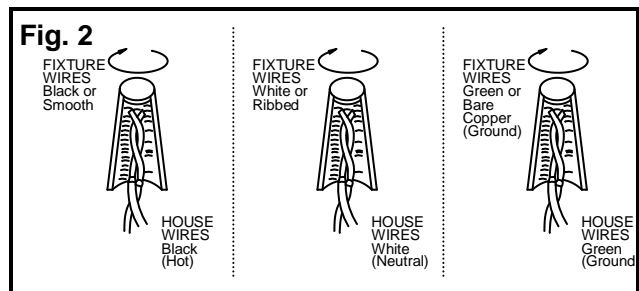


This lamp use on-off switch on base. Please use A19 60W, E26 bulb.



Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Spare Parts Bag B:

- D:** P4 Wire Nuts (3PCS)
- M:** Cap--- Dia12mm * H9.5mm (1PC)
- L:** Screw--- 3/25*1"L (2PCS)
- K:** Back Plate--- 5-1/2"*4-1/2"*5/8" (1PC)



B