

Installation Instructions

For table lamp

ITEM#:P765-613

WARNING

- Risk of shock, do not supply power before assembly is complete.
- Do not exceed the maximum wattage rating (Max 100W x2) **(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
- Before turning on, please follow the instructions step by step.


INSTALLATION

1. Place all parts on a smooth, flat surface to protect the finish until ready to install.
2. Insert three crystal block into the square frames (F).
3. Install the tube (C) to the top of socket cluster (G).
4. Install the light bulbs (D) into sockets (E) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
5. Place the center ring of the shade (B) onto the threaded end of the tube (C). Use the finial (A) to secure the shade (B) onto the tube (C) tightly.
6. Adjust the shade until it is leveled horizontally.

IMPORTANT SAFETY INSTRUCTIONS

1. This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted. Do not change or alter the plug.
2. This lamp has a pull chain switch on each socket. Pull the chain to control the bulb above it. Please use medium base, 100W MAX Bulb.

IN AN ONGOING EFFORT TO BE ENVIRONMENTALLY FRIENDLY AND IN COMPLIANCE WITH CALIFORNIA TITLE 20 AN ENERGY SAVING COMPACT FLUORESCENT BULB(S) IS INCLUDED.PLEASE NOTE THAT THE LIFE EXPECTANCY OF THE BUBL(S) IS NOT GUARANTEED

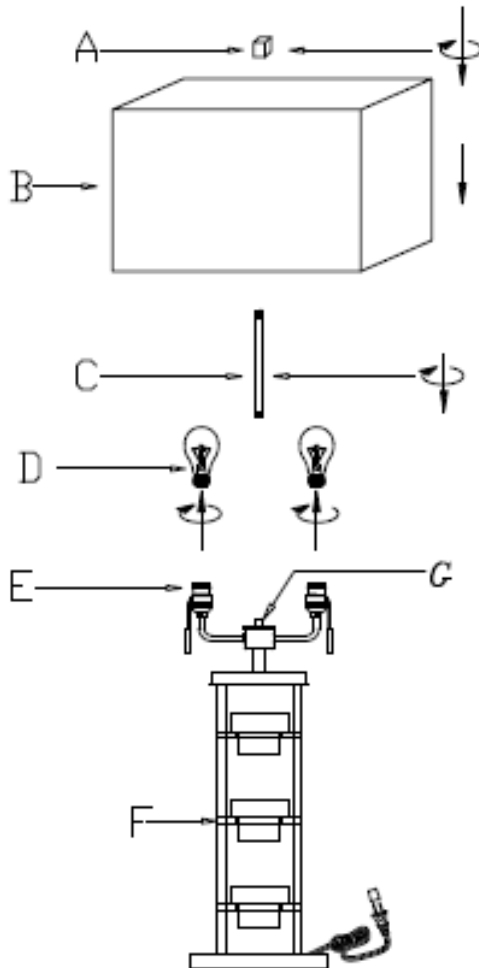

Intertek