

INSTALLATION INSTRUCTIONS

Item#P976 (New. 05/18/2011)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware
3. Determine length desired and connect the Down Rods (L) to Fixture body (M), Lace the fixture's wires through one side of Down Rods (L). Then secure the Swivel (I) onto the Down Rods (L).
4. Place Canopy (H), Metal plate (G), Lock washer (F) and Metal washer (E) over bottom of the Swivel (I), fasten with the Hex nut (D) by using spanner (J) included.
5. Attach the Crossbar (A) to the junction box with the Junction box screws (B) as shown. The side of the Crossbar marked "GND" must face out
6. Thread the Nipple (C) part way into the center hole of the Crossbar (A).

CONNECTING THE WIRES (Fig. 2)

7. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the crossbar using the Green Screw provided. After wires are connected, tuck them carefully inside the Junction Box.

COMPLETING THE INSTALLATION (Fig. 1)

8. Place the Canopy (H) over the Nipple (C) secure with the Cap Nut (K).
9. Install the Halogen bulbs (N) (included) to socket by using the Suction cup Tool (O) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!).**
10. Secure the Glass Shade (P) to the Socket Cup by twisting the Glass Shade (P) as shown in Fig.1.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig. 1


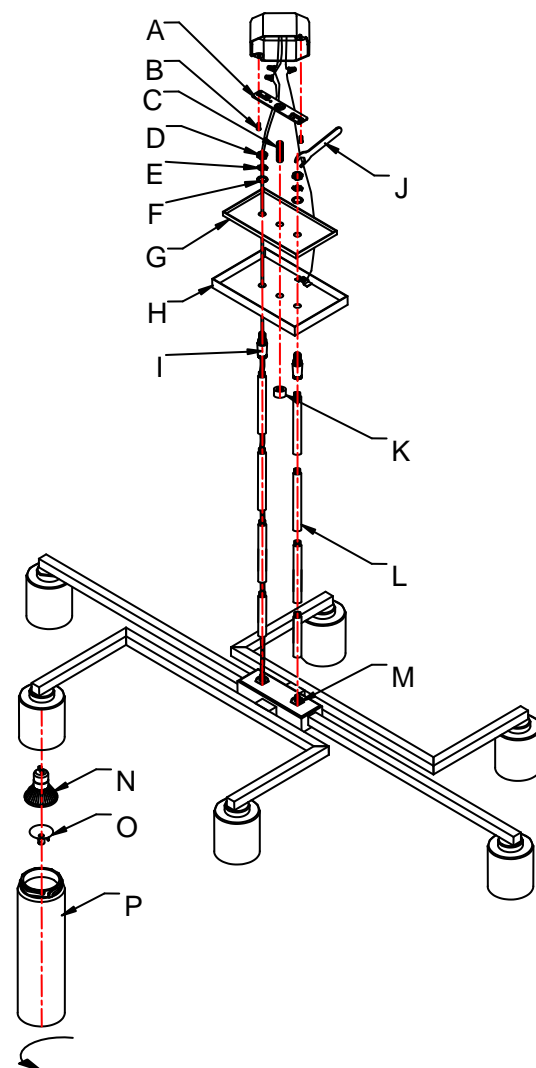


Fig. 2

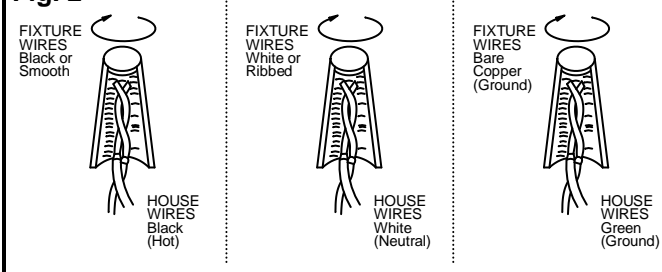

american
lighting
association