

# INSTALLATION INSTRUCTION

Item# 12654-732

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT ! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Screw Canopy (D) onto Fixture Thread (E). Carefully feed wires through each part as you assemble.
4. Attach mounting plate (A) to junction box (not included) with GND mounting Screw (B) the side of the mounting plate (A) marked with GND, and two convex points must face out.
5. The support cable is provided to support weight of the Fixture while wiring. Align fixture to mounting plate (A) and attach hook (I) on the end of support cable (H) to a slot located on mounting plate (A). Carefully allow support cable (H) to support weight of fixture while wiring.

### CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided.
7. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

8. Place canopy (D) over mounting plate (A) and secure with screws (C).
9. Install (5) five candelabra base bulb up to 60 watts each on CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
10. From the bottom ring of the Fixture frame, attach the glass (G) on the hook (F) of fixture frame.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

Fig. 1



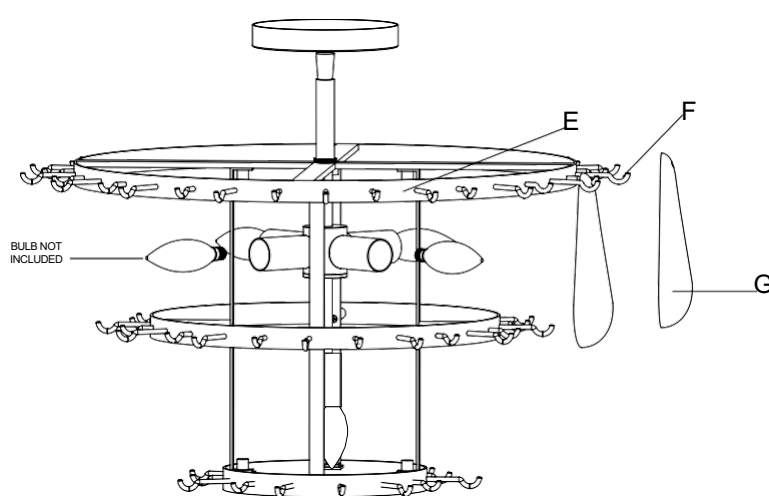


Fig. 2

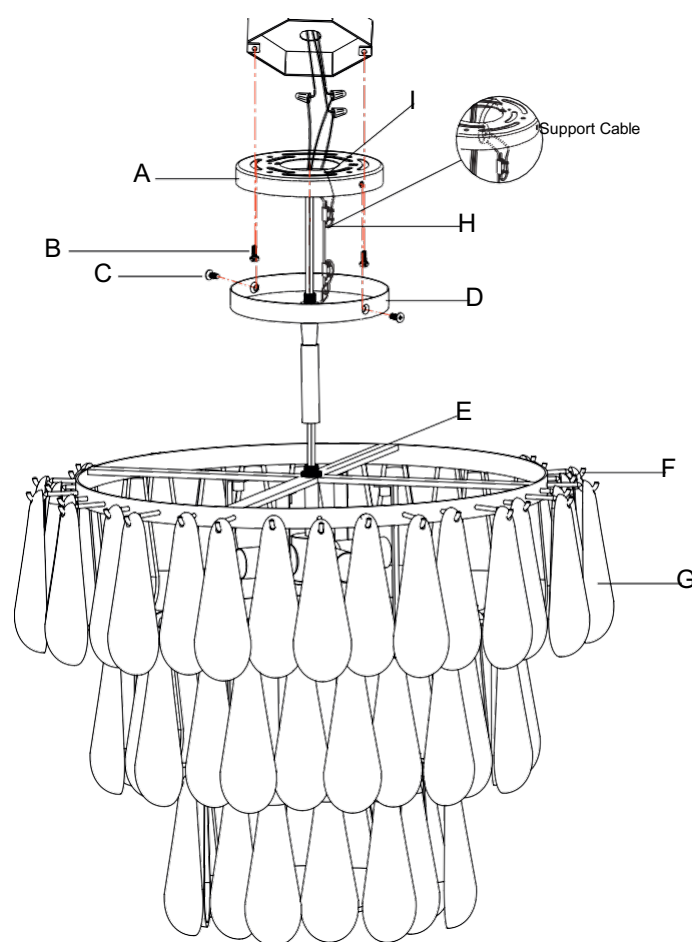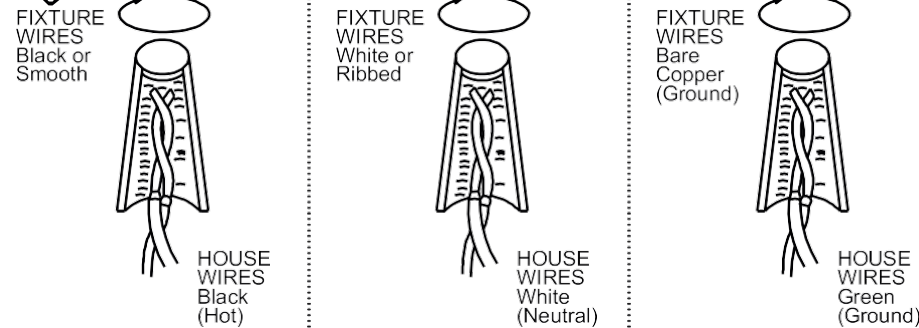

american  
lighting  
association