

INSTALLATION INSTRUCTIONS

Model # 72356-PL

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the circuit breaker (avertissement! couper le courant au niveau des fusibles ou du disjoncteur) and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.



CONNECTION THE WIRES (Fig. 2)

3. Connect the electrical wires (F) while supporting the lantern. If your post has a ground wire (green or bare copper), connect the fixture's ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post cup (C).

FINISHING THE INSTALLATION (Fig.1)

4. Align the lantern with post (G) and secure with screws (D) (Part#8/32"*3/8"L). (Fig.1)
5. At this point, install 1X26W /GU24 PL bulb (one bulb included) in accordance with the fixture specifications. Note: To prevent damage to the bulb during installation, hold the bulb by the base only while installing into the socket. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
6. Carefully slide glass shade (A) from the top, into cage (B)

Fig. 1

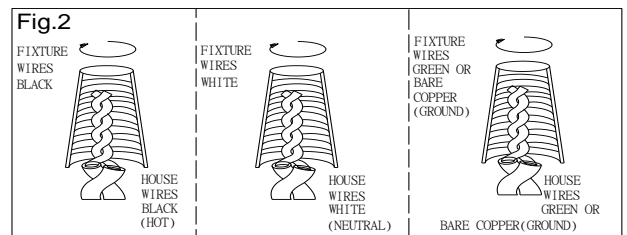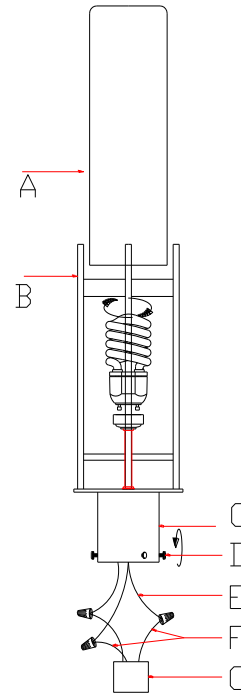

Your installation is now complete. Return power to and test the fixture

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

