

# INSTALLATION INSTRUCTIONS

Item #N9633

## READ AND SAVE THESE INSTRUCTIONS

### PREPARING THE FIXTURE



1-Carefully unpack the new fixture and lay out all the parts on a clear area. Take care not to lose any parts necessary for installation.

Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.

### MOUNTING THE FIXTURE

2-(Fig.1 )Pass the power cables through the appropriate hole in the support disk



3-(Fig.2)after passing the cables.screw the support disk to the ceiling box

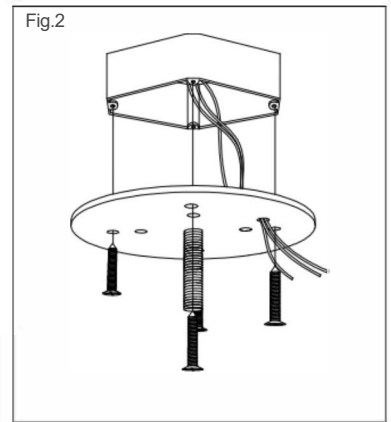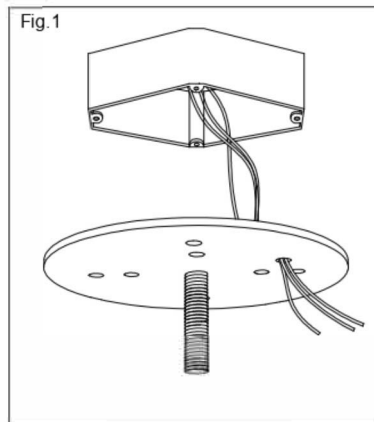

### CONNECTING THE WIRES

4-(Fig.3) At this point, connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the screw provided.

Tuck wire connectors neatly into outlet box.

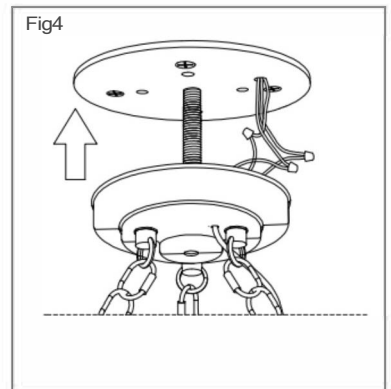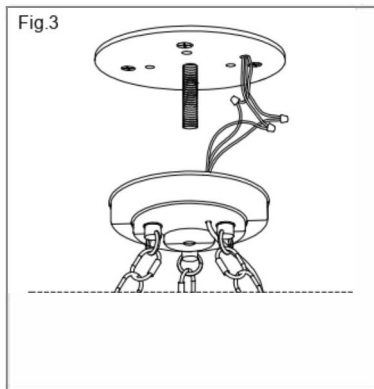



### FINISHING THE INSTALLATION

5-(Fig.4) To mount the fixture to the ceiling, insert the all thread through the fixture. Use the decorative knob to tighten the fixture securely to the ceiling.

6-Install bulbs up to 60 watts each or LED equivalent (not included) in accordance with the fixture specification-DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER THE MAXIMAL NOMINAL PUISSANCE!).

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration on this manual is for installation purposes only. It may or may not be identical to the fixture purchased. Do not clean your light fixture or parts with water or cleanser.

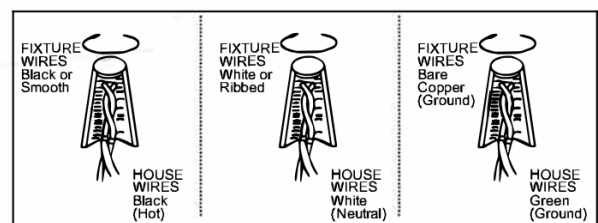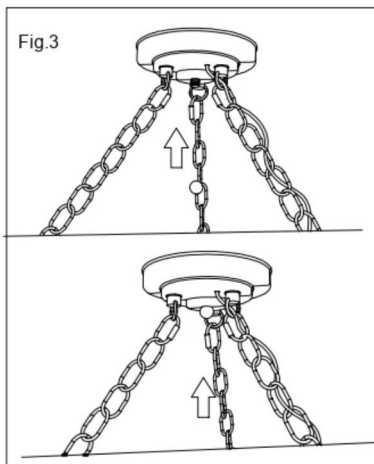

# INSTRUCTIONS D'INSTALLATION

Article #N9633

## LISEZ ET CONSERVEZ CES INSTRUCTIONS

### PRÉPARATION DU LUMINAIRE



1-Déballez soigneusement le nouveau luminaire et disposez toutes les pièces sur une zone dégagée. Veillez à ne perdre aucune pièce nécessaire à l'installation.

Coupez l'alimentation au niveau de la boîte à fusibles ou du disjoncteur. Si nécessaire, retirez l'ancien luminaire, y compris le matériel de montage.

### MONTAGE DU LUMINAIRE

2-(Fig.1 )Passez les câbles d'alimentation à travers le trou approprié du disque support



3-(Fig.2)après avoir passé les câbles.visser le disque support au boîtier de plafond

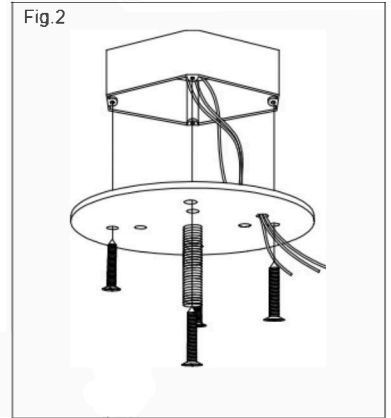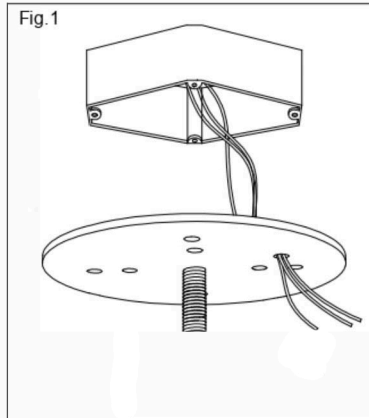

### CONNEXION DES FILS

4-(Fig.3) À ce stade, connectez les fils électriques comme indiqué sur la Fig. 3, en vous assurant que tous les connecteurs de fils sont sécurisés. Si votre boîte de prise est équipée d'un fil de terre (vert ou cuivre nu), connectez-y le fil de terre du luminaire. Sinon, connectez le fil de terre du luminaire directement à la sangle de montage à l'aide de la vis fournie.

Rentrez soigneusement les connecteurs de fils dans la boîte de sortie.

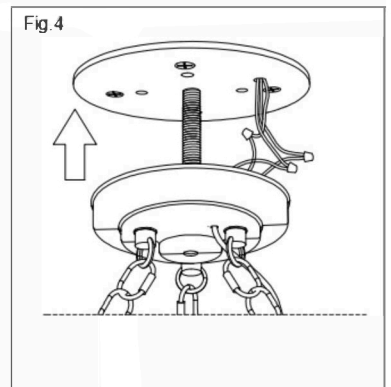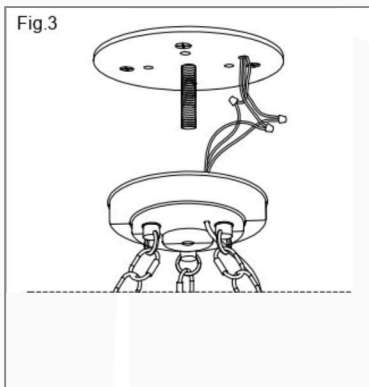


### FINIR L'INSTALLATION

5-(Fig.4) Pour monter le luminaire au plafond, insérez tout le filetage à travers le luminaire. Utilisez le bouton décoratif pour serrer solidement le luminaire au plafond.

6-Installez des ampoules jusqu'à 60 watts chacune ou l'équivalent LED (non incluses) conformément aux spécifications du luminaire. **NE DÉPASSEZ PAS LA PUISSANCE MAXIMALE ! (NE PAS DÉPASSER LA PUISSANCE NOMINALE MAXIMALE !).**

Votre installation est maintenant terminée.

Remettez le courant dans la boîte de prise et testez le luminaire.

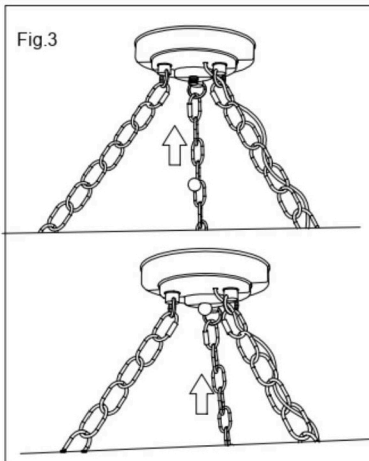

Remarque : Les illustrations de ce manuel sont uniquement destinées à des fins d'installation.

Cela peut ou non

être identique au luminaire acheté. Ne nettoyez pas votre luminaire ou ses pièces avec de l'eau ou un nettoyant.

