INSTALLATION INSTRUCTIONS

Item#P5438-697-L (Rev. 06/02/2023)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUTPOWEROFFAT FUSEORCIRCUITBREAKER. AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION

- 1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
- 2. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.

MOUNTING THE FIXYURE (Fig. 1)

- 3. To retract the wire, gently push it into the light fixture base. To extend the wire, push the metal collar while gently pulling the wire down. When the metal collar is released, the wire will be fixed into position. Now turn the fixture over and slide the plastic wire retainer up to the hex nut of canopy, as a secondary safety precaution to prevent the fixture from slipping down when in use.
- 4. Loosen mounting plate screws (E) to remove mounting plate (B) from canopy (D).
- Attach mounting plate (B) to outlet box (not included) using outlet box screws (C) (Size: #8-32N*L1"L) as shown in Fig.1. Make sure the side of the mounting plate marked "GND" must face out.

CONNECTION THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (B) using the green screw provided. After wires are connected, tuck them carefully inside the outlet box.


FINISHING THE INSTALLATION (Fig. 1)

 Mount canopy (D) onto mounting plate (B) and secure it with mounting plate screws (E).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purpose only. It may or may not be identical to the fixture purchased.

Dimmable with ELV and/or LED compatible wall dimmer switch.

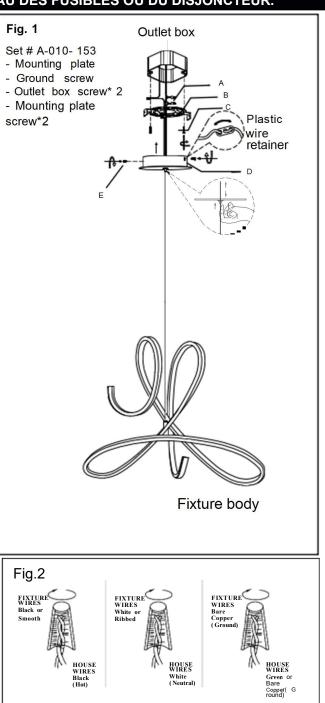

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

