

# INSTALLATION INSTRUCTIONS FOR

12396-732

## READ AND SAVE THESE INSTRUCTIONS

### WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

#### ASSEMBLING THE FIXTURE (Fig.1) (Chandelier)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove existing fixture and its mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation. Check that all parts are included as shown in the illustration.
3. Adjust arms to proper position as shown in Fig.1.
4. Align arms of top assembly (K) to the holes of metal ring (L), securing with screws (N).
5. Install large rod (M) onto socket assembly (O) as shown in Fig.1.
6. Install top assembly (K) to large rod (M), then attach fixture loop (J) by threading into all thread of top assembly (K), as shown in Fig.1.
7. Feed fixture wire carefully through rod (M), top assembly (K) and fixture loop (J) as shown in Fig.1.

#### HANGING THE FIXTURE (Fig.1)

8. Thread all thread (D) into ceiling loop (G) until snug.
9. Thread other end of all thread into crossbar (A) until snug. Note: The length of all thread into crossbar may be adjusted if necessary.
10. Use lock washer and hex nut (C) to secure all thread (D) into crossbar (A).
11. Take crossbar assembly and mount to outlet box (Not included) with mounting screws (B) (Size: #8-32N\*L1"). The side of crossbar marked with "GND" must face out.
12. Determine desired hanging height and use a pair of proper chain pliers to remove and discard excess chain (I).
13. Open one end of quick link (H) and attach to fixture loop (J) and close quick link (H). Slip lock collar (F) and canopy (E) over chain (I) and allow them to rest on fixture body. Open another end of quick link (H) and attach to ceiling loop (G) and close quick link (H).
14. Carefully lace fixture's wires through chain (I), ceiling loop (G) and all thread assembly.

#### CONNECTING THE WIRES (Fig.2)


15. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to crossbar (A) using green screw provided.
16. Tuck wire connections neatly into outlet box.
17. Raise canopy (E) onto ceiling loop (G) and secure with lock collar (F). (Fig. 1)

**Fig.1**

Set#

Chain#

- Crossbar
- Green Screw
- Mounting Screw \*2

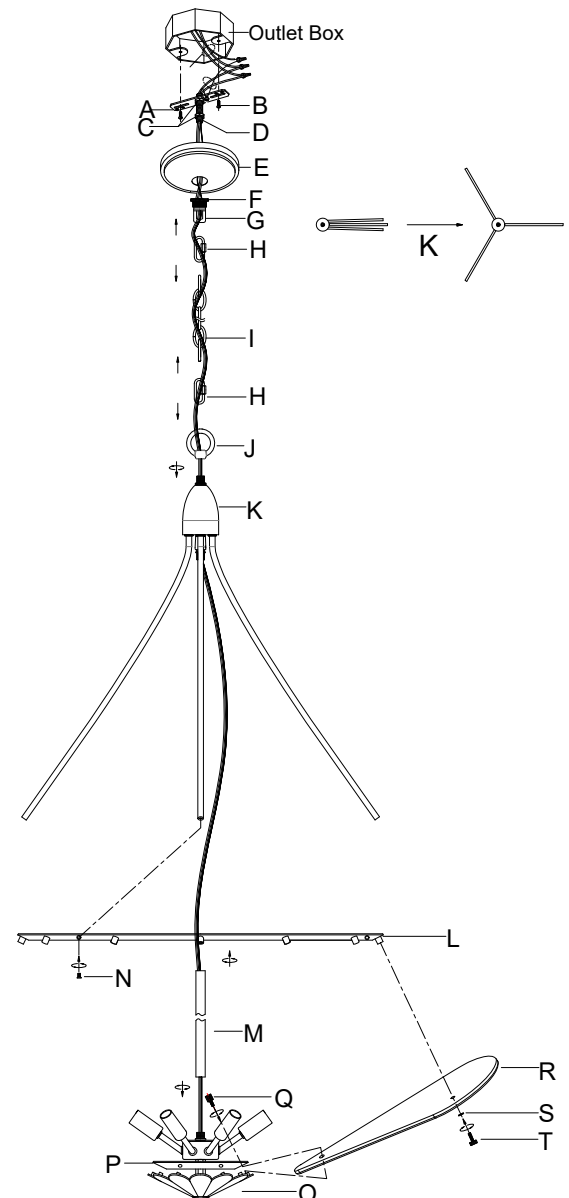


Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

**COMPLETING THE INSTALLATION (Fig. 1)**

18. Install (6) six candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**

19. Carefully place alabaster (R) onto the cap of socket assembly (O), then align ring (P) with the bottom hole of the alabaster (R) and securing with screws (Q). Do not over tighten.  
20. Line up the holes on top alabaster (R) to the metal ring (L), securing with rubber washer (S) and screws (T). Do not over tighten.

**Fig.2**

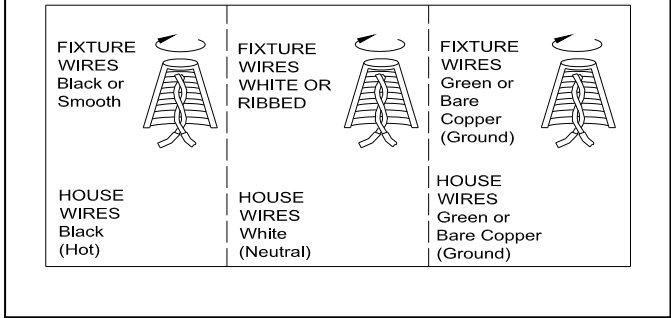

Your installation is now complete. Return power to outlet box and test the fixture.

**Note:** Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

**ATTENTION:** You have purchased a product made with natural materials. It will exhibit naturally formed pits, voids, surface imperfections, and coloring variations not controlled by manufacturing. The appearance of natural materials can be affected by household cleansers and dirt. Please test any intended cleansers in an obscure location before applying to the visible surfaces.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

## MOUNTING THE FIXTURE (Fig.1) (Semi-flush)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove existing fixture and its mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation. Check that all parts are included as shown in the illustration.
3. Adjust arms to proper position as shown in Fig.1.
4. Align arms of top assembly (K) to the holes of metal ring (L), securing with screws (N).
5. Install large rod (M) onto socket assembly (O) as shown in Fig.1.
6. Install top assembly (K) to large rod (M), then attach canopy (H) by threading into all thread of top assembly (K), as shown in Fig.1.
7. Place flat plate (G) and lock washer (F) through all thread onto the canopy (H), securing with hex nut (E).
8. Feed fixture wire carefully through rod (M), top assembly (K) and canopy (H) as shown in Fig.1.
9. Thread canopy screws (C) into pre-drilled holes in mounting plate (A). Spaced same distance apart as holes in canopy (H), and secure with the nuts (D) provided. The length of canopy screws (C) may be adjusted if necessary.
10. Attached mounting plate (A) to outlet box (Not included) using mounting screws (B) (Size: #8-32N\*L1"). The side of mounting plate (A) marked with "GND" must face out.

### CONNECTING THE WIRES (Fig. 2)

11. Connect the electrical wires as shown in fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to mounting plate (A) using the ground screw provided.
12. Tuck the wire connectors neatly into the outlet box.

### FINISHING THE INSTALLATION (Fig.1)

13. Raise canopy (H) over canopy screws and secure with cap nuts (I).
14. Install (6) six candelabra base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
15. Carefully place alabaster (R) onto the cap of socket assembly (O), then align ring (P) with the bottom hole of the alabaster (R) and securing with screws (Q). Do not over tighten.
16. Line up the holes on top alabaster (R) to the metal ring (L), securing with rubber washer (S) and screws (T). Do not over tighten.

Your installation is now complete. Return power to outlet box and test the fixture.

**Note:** Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased

**ATTENTION:** You have purchased a product made with natural materials. It will exhibit naturally formed pits, voids, surface imperfections, and coloring variations not controlled by manufacturing. The appearance of

natural materials can be affected by household cleansers and dirt. Please test any intended cleansers in an obscure location before applying to the visible surfaces.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.


**Fig.1**

Set#

-Mounting Plate

-Green Screw

-Mounting Screw \*2

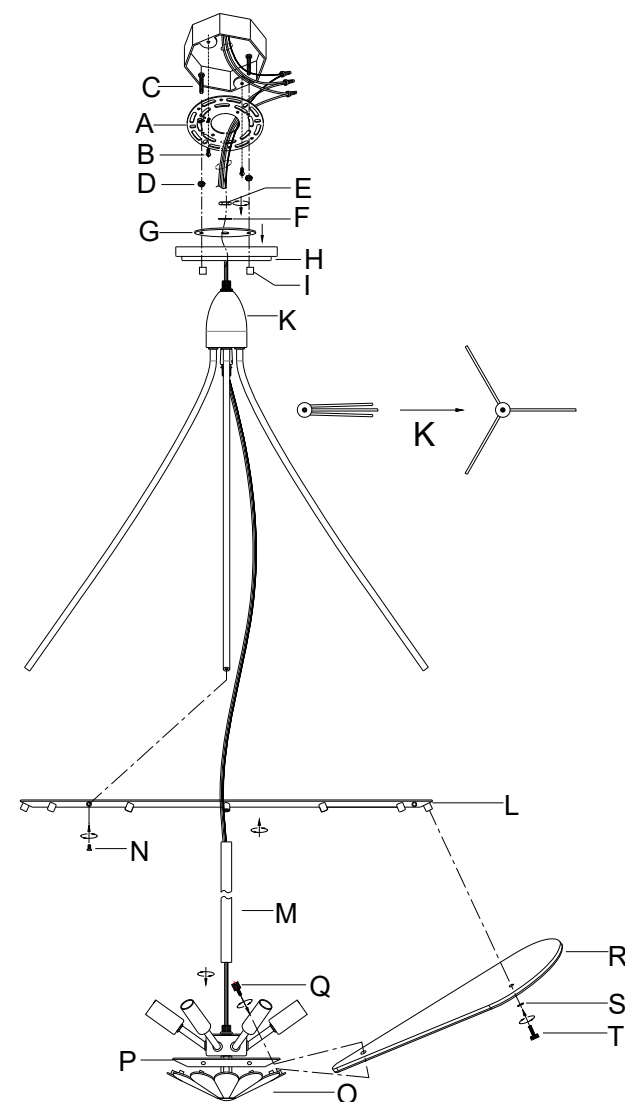

**Fig.2**

<p>FIXTURE WIRES Black or Smooth</p>	<p>FIXTURE WIRES WHITE OR RIBBED</p>	<p>FIXTURE WIRES Green or Bare Copper (Ground)</p>
<p>HOUSE WIRES Black (Hot)</p>	<p>HOUSE WIRES White (Neutral)</p>	<p>HOUSE WIRES Green or Bare Copper (Ground)</p>