
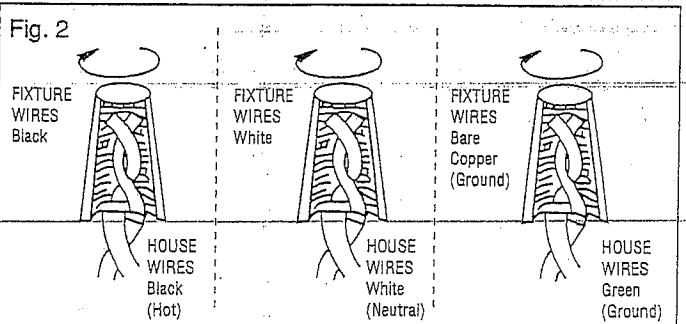


1257-357

INSTALLATION INSTRUCTION for #N2316 (Rev. 03/01/98)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

1. Shut off power at the circuit breaker and remove old fixture.
2. Carefully unpack your new fixture and lay out the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Feed the wires from shade through light cluster assembly and thread the shade into the light cluster assembly.
4. Thread the two studs about 1/4" into the pre-drilled holes in the crossbar spaced the same distance apart as the holes in the canopy.
5. Attach the crossbar to the outlet box using the two screws from the outlet box. The side of the crossbar marked "GND" must face out.
6. While holding the light cluster assembly towards the ceiling, connect the electrical wires as shown in Fig. 2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, connect the fixture ground wire to the crossbar with the green screw provided. After wires are connected, tuck them carefully inside the junction box.
7. Finish mounting the fixture by placing the canopy over both studs and secure the light cluster assembly against ceiling with knurled knobs.
8. Install the light bulbs in accordance with the fixture specifications. **DO NOT EXCEED MAXIMUM WATTAGE RATING!**

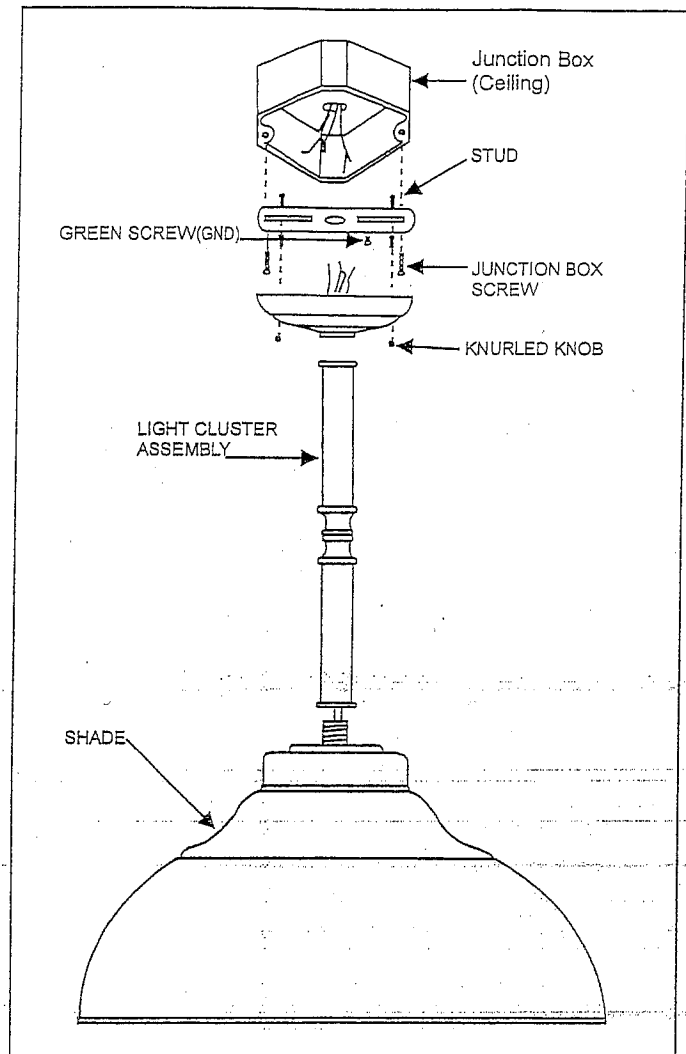

Your installation is now complete. Return power to the junction box and test the fixture.

american
lighting
association

LA-250E