

INSTALLATION INSTRUCTIONS

Item#4398 (New. 02/18/2012)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the crossbar (A) to the outlet box using two outlet Box Screws (B) (Size: #8-32N*L0.5"). The side of the Crossbar marked "GND" must face out.

INSTALLING THE FIXTURE (Fig. 1)

4. By measuring, determine the desired hanging height and select the proper rods (F).
5. Feed the fixture wire carefully through one of the fixture loops (I), quick link (H), loop (G), rod(s) (F) and swivel of canopy (D).
6. Connect the rods (F) to loop (G) and thread the top rod to the swivel of canopy (D).
7. Attach the loop (G) to the fixture loop (I) using quick link (H).
8. Attach the metal sheet (K), glass panel (J & O) to the arms (N) and secure with plastic washer (L) and knurled knob (M).
9. Thread the nipple(C) part way into the center hole of the crossbar (A). The side of the cross bar marked "GDN" must face out.

CONNECTING THE WIRES (Fig. 3)

10. Connect the electrical wire as shown in (Fig.2), making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture ground wire directly to the crossbar (A) using the green screw provided. Tuck the wire connections neatly into the outlet box.

COMPLETING THE INSTALLATION (Fig. 1)

11. Place the canopy (D) over the nipple (C) and secure with nut (E).
12. Install the light bulb(s) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

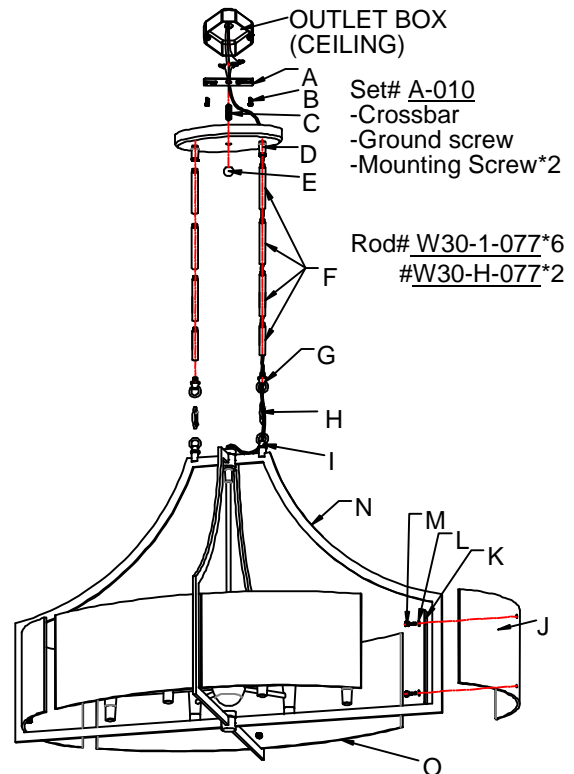


Fig. 3

