

# INSTALLATION INSTRUCTIONS

Item#5244 (New. 08/29/2013)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Position the mounting plate (A) on the wall, and mark the location of the two drywall anchors (K). Pre-drill the holes for the drywall anchors (K) and insert the drywall anchors (K) into the wall.
4. Attach the mounting plate (A) to the outlet box using the mounting screws (B) (Size: #8-32N\*L0.5"). The side of the mounting bracket marked "GND" must face out.
5. Place the wood screws (L) through the mounting plate and into the drywall anchors (K) to secure the mounting plate (A) to the wall.

### CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

### FINISHING THE INSTALLATION (Fig.1)

7. Place fixture body (D) over mounting plate (A) and secure it with screws (C).
8. Place the glass shade (F) and metal cover (G) over the socket (E) and secure with socket ring (H) using the tool (I) provided.
9. Install the light bulb(s) (J) (included) in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**


Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1

Set# A-021-832105


- Mounting Plate
- Ground screw
- Mounting Screw\*2

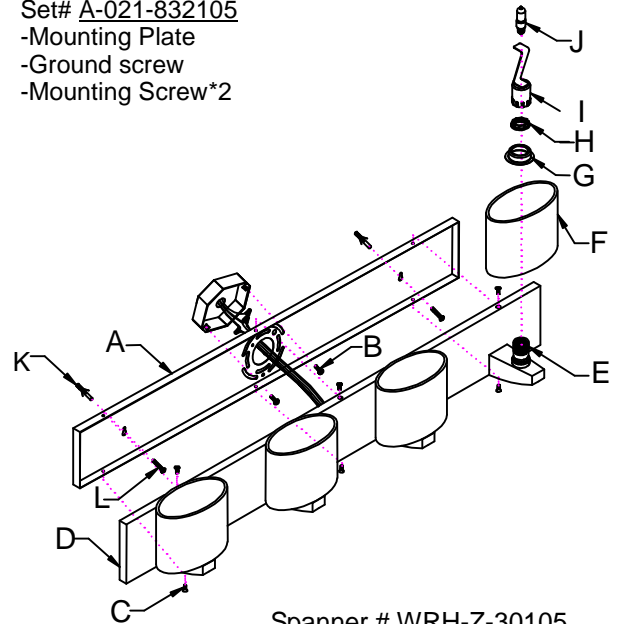

Spanner # WRH-Z-30105

Socket Ring # SKT-RING-11

Fig. 2

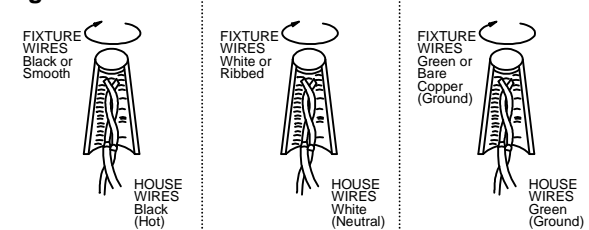

american  
lighting  
association