

INSTALLATION INSTRUCTIONS

For Outdoor Lantern (Rev. 31/08/2011)

READ AND SAVE THESE INSTRUCTIONS




WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the circuit breaker and remove the old fixture including mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to misplace any small part necessary for installation.
3. Pull the black, white and ground wires out of the post (G).
4. While supporting the lantern, connect the electrical wires as shown in (Fig 2). If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post. Align the lantern with the post and secure with screws (F). (Fig.1&2)
5. Install the PL bulb (B) (included) into socket (D) in accordance with the fixture's specification. **(DO NOT EXCEED THE SPECIFIED WATTAGE!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
6. The ballast and lamp are combined, to replace or install, twist pins into socket as shown on Fig 3.
7. This fixture is rated for a minimum start temperature of 0 degrees Fahrenheit (-17 degree Celsius).
8. This fixture is ETL Listed for Wet Location applications.
9. Screw the glass shade (A) onto the fixture body (C) by twisting it clockwise as shown in (Fig.1).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

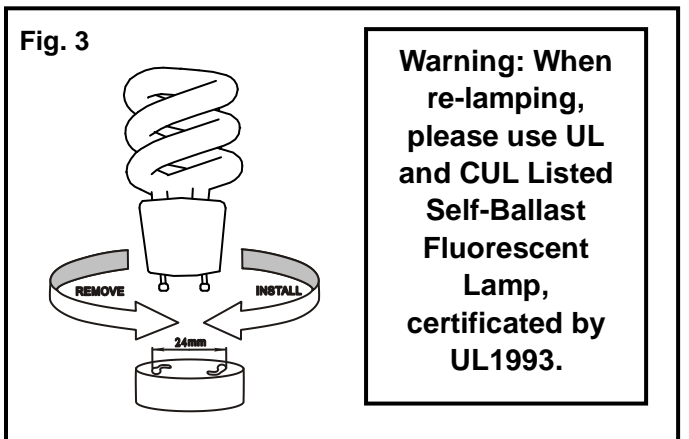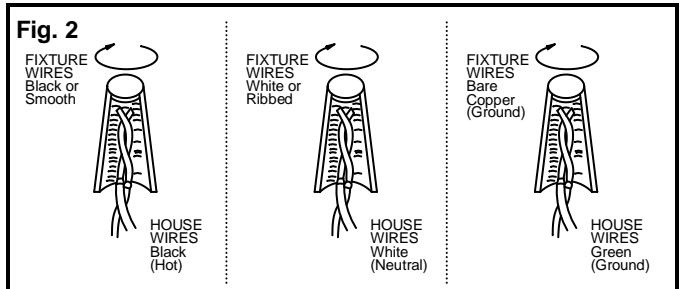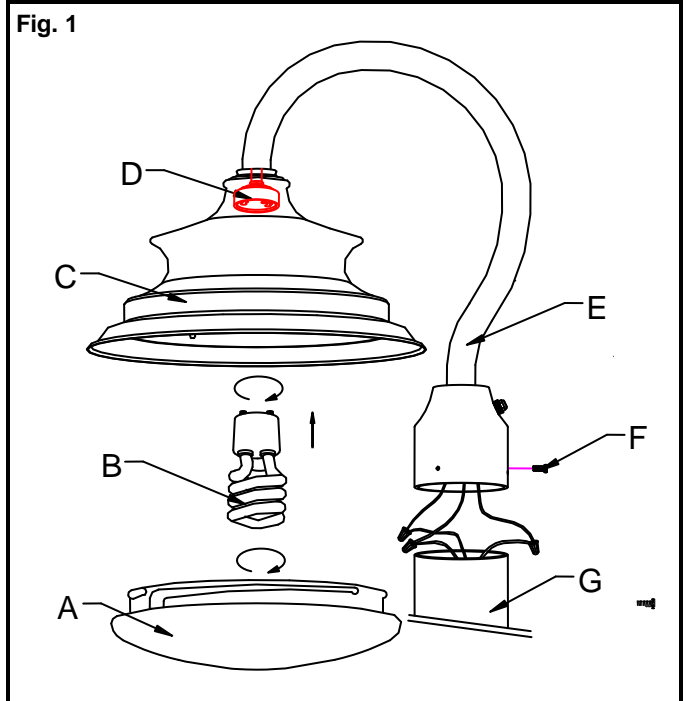

LA-1149E-A



american
lighting
association