

INSTALLATION INSTRUCTIONS FOR CHAIN HUNG MODEL N6458-652

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

Carefully unpack your new fixture and lay out all the parts on a clear area. Make sure not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.2)

1. Set the arms to suitable position, see figure.2.
2. Attach the loop (A) to the fixture body (B) by turning it clockwise until tight.

HANGING THE FIXTURE (Fig.1)

IMPORTANT: For a safe and secure installation, this fixture must be installed by means of support that is independent of the outlet box.

SUGGESTED INSTALLATION:

3. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
4. Provide a 1/4" IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown.
5. Assemble the ceiling loop, nipple, nuts and hickey to center 1/4" IPS support pipe and adjust overall length to allow the lock collar to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three (3) nuts, as shown.
6. Attach the chain to the fixture loop. Slip the lock collar and canopy over the upper end of the chain. Open the end link of the chain and lift the fixture to attach to the ceiling loop and secure the link.
7. Lace the fixture wires, ground wire and safety cable through the chain and loop, exiting through the side of hickey. Run the safety cable through the top of the outlet box and secure to structural member.

CONNECTING THE WIRES (Fig.3)

8. At this point, connect the electrical wires as shown in Fig.3 making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the junction box.
9. Tuck these wire connections neatly into the ceiling junction box.
10. Raise the lock collar and thread onto ceiling loop protruding through canopy.

COMPLETING THE INSTALLATION (Fig.2)

11. Thread the pipe nipple (I) into bottom center of the fixture body (B) and lock it securely with the hex nut of the pipe nipple (I). Attach the column (J), the cover (K), the frame (L) and the cover (K) to bottom of the fixture body (B), aligning the hole with pipe nipple and screw it with ball nut (M).
12. Place the tube (C) over the socket of the fixture body (B).
13. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
14. Hang the crystals (D) to the top loop of the arm (E).
15. Hang the crystals (F), the crystals (G) and the crystals (H) to the loop of the arm (E) and the arm (P).
16. Hang the crystals (G) and the crystals (Q) to the loop of the arm (R).
17. Hang the crystals (O) to the loop of the frame (L).
18. Hang the crystal (N) to the loop of the ball nut (M).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1


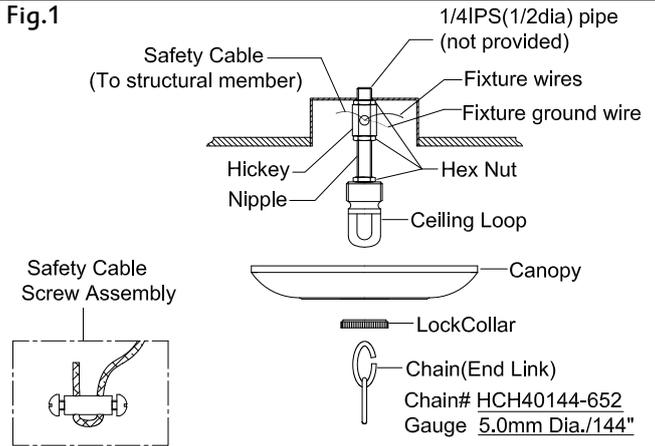


Fig.2

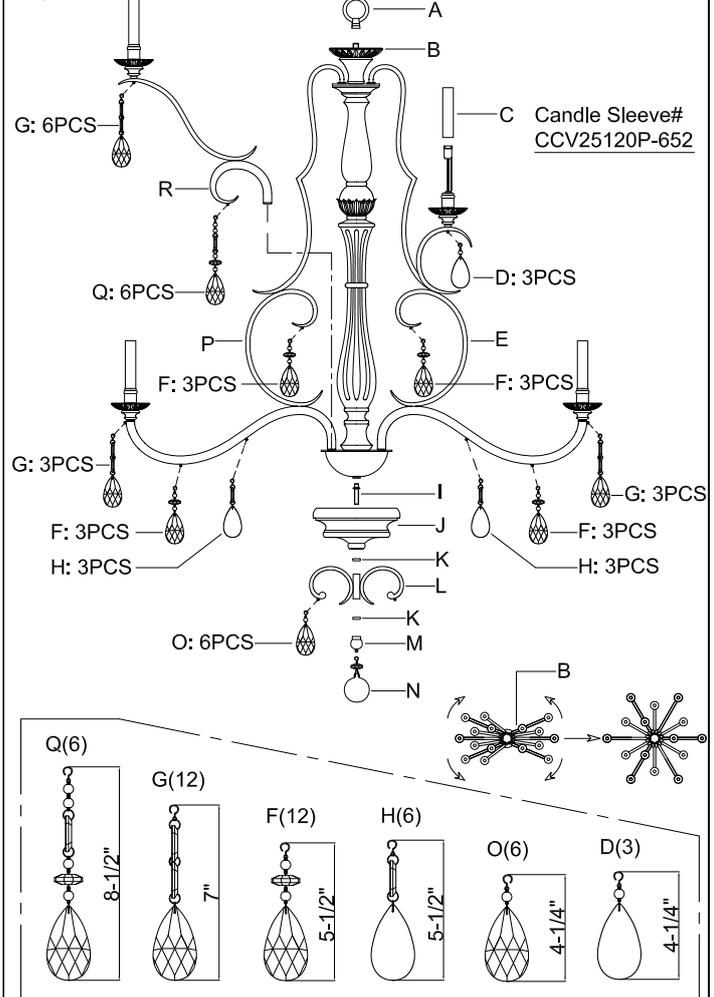

CHAIN HUNG FIXTURE INSTRUCTION

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.




Fig.3

