

INSTALLATION INSTRUCTIONS

For Model P854-084/647

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.

SUGGESTED INSTALLATION (Fig. 1)

3. Thread the two mounting studs (B) into the pre-drilled holes in crossbar (A) (You can adjust the length of the mounting studs if necessary) .
4. Attach the crossbar (A) to the outlet box with mounting screws (C) (Size: #8-32N*L0.5"). The side of crossbar (A) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

5. While holding the fixture body (E) toward the ceiling. Connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it and secure with wire connectors, otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided. After wires are connected, tuck them carefully into the ceiling junction box.

COMPLETING THE INSTALLATION (Fig. 1)

6. Attach fixture body (E) to mounting studs (B) and secure with knurled knobs (D).
7. Install the light bulb (not included) in accordance with fixtures specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
8. Place metal ring (H) into glass panel (I) and then place glass shade (G) into metal ring (H).
9. Align glass assembly (G), (H) and (I) to studs (K). While supporting the glass assembly, secure with finials (F). Repeat step 9 for each finial (F).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1


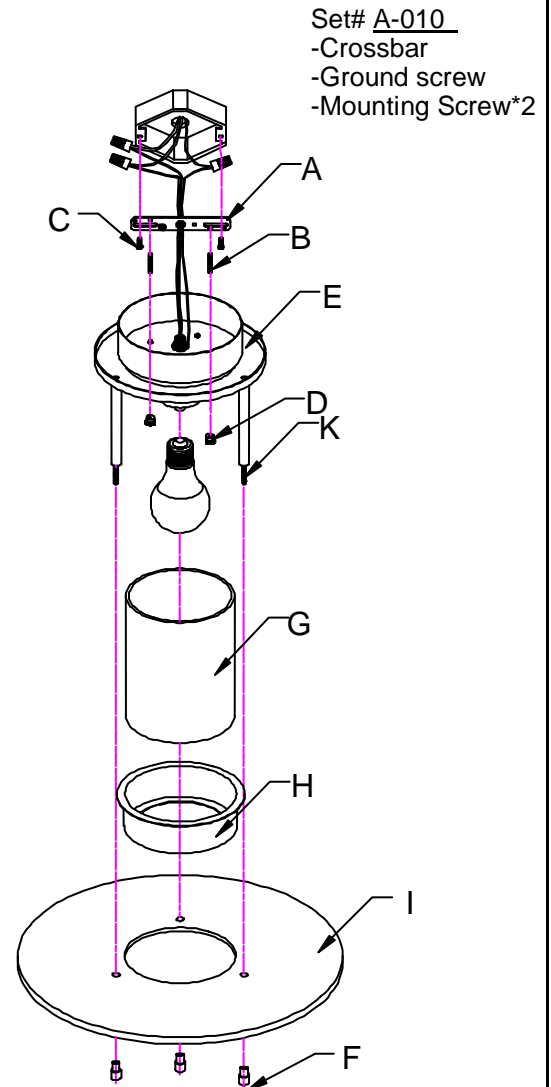


Fig.2

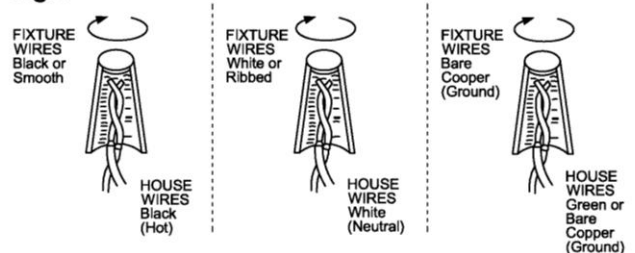

american
lighting
association